

OKI electronic components

OCM1□2, 1□3 SERIES

Low ON-resistance Type Optical MOS Relay For DC Load Only

GENERAL DESCRIPTION

The OCM1□2 and OCM1□3 Series are optical MOS relays for DC load only. The input portion is an infrared light emitting diode. The output portion uses a combination of VD-MOS (Vertical Diffusion MOS) FETs and photodiode arrays. The device is encased in an extremely small 6-pin plastic DIP or SMD-type (gull-wing) package.

The optical MOS relay switch may be used in applications that currently use mechanical relay switches, but offers smaller size, noise-free switching, and electronic circuit compatibility because of its non-mechanical operation. Optical MOS relay switches also dissipate less power than equivalent bipolar devices at lower switching frequencies.

FEATURES


- Infinitesimally small control voltage
- High reliability due to non-contact and optical operation
- No chattering or switch bounces
- No mechanical switching noises
- Small size and easy mounting (6-pin plastic DIP or SMD-type [gull-wing] package)

APPLICATIONS


- Telecommunications equipment
- Measurement equipment
- Home electronics
- Automatic meter reading equipment
- Other applications requiring small size or high performance
- Other applications requiring non-contact switches

(Unit: mm)


- SMD Type (gull-wing)

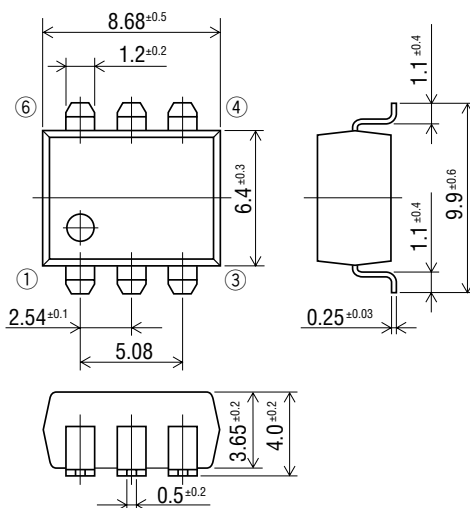

- Mounting pad (Top view)



- 1: Anode (LED)
2: Cathode (LED)
3: NC
4: Drain (MOS FET)
5: Source (MOS FET)
6: Source (MOS FET)



OPTICAL MOS RELAYS

OCM1□2, 1□3 Series

ABSOLUTE MAXIMUM RATINGS

(Ambient temperature Ta=25°C)

Product Name					OCM102	OCM112	OCM122	OCM142
Parameter					OCM103	OCM113	OCM123	OCM143
Input Characteristics	Continuous Forward Current	I_F		mA	50			
	Derating Factor of Continuous Forward Current	ΔI_F		mA/°C	Refer to [Derating Factor of Continuous Forward Current] of characteristics data			
	Peak Forward Current	I_{FM}	Pulse width 100 μ s Cycle 10 ms	A	0.5			
	Reverse Voltage	V_R		V	5			
	Power Dissipation	P_{DL}		mW	75			
Output Characteristics	Load Voltage	V_{OFF}		V	60	100	200	400
	Load Current	I_{ON}		mA	500	450	350	200
	Derating Factor of Load Current	ΔI_{ON}		mA/°C	Refer to [Derating Factor of Load Current] of characteristics data			
	Surge Load Current	I_{SUG}	Pulse width 1 ms 1shot	A	3.5			1.5
	Power Dissipation	P_D		mW	300			
	Total Power Dissipation	P_{tot}		mW	325			
Isolation Voltage					1500			
					OCM102	OCM112	OCM122	OCM142
					4000			
					OCM103	OCM113	OCM123	OCM143
Operating Temperature					T_{opr}			
Storage Temperature					T_{stg}			

ELECTRICAL CHARACTERISTICS


(Ambient temperature Ta=25°C)

Product Name						OCM102	OCM112	OCM122	OCM142
Parameter		Symbol	Condition		Unit	OCM103	OCM113	OCM123	OCM143
Input Characteristics	Forward Voltage	V_F	$I_F=10\text{ mA}$	Min.	V	1.0			
				Max.		1.3			
	Reverse Current	I_R	$V_R=5\text{ V}$	Max.	μA	10			
	Operation Input Current *1	I_{FA}	$I_{ON}=100\text{ mA}$	Max.	mA	5			
Output Characteristics	Recovery Input Current	I_{FR}	$V_{OFF}=\text{Rating}$ $I_{ON}=100\text{ }\mu\text{A}$	Min.	mA	0.2			
	On-resistance	R_{ON}	$I_F=10\text{ mA}$ $I_{ON}=100\text{ mA}$ Time to flow current is within one second	Min.	Ω	0.2	0.3	1.0	3.0
				Typ.		0.5	0.7	1.5	4.5
				Max.		0.75	1.0	2.0	6.2
	Off-state Leakage Current *2	I_{OFF}	$V_{OFF}=\text{Rating}$	Max.	mA	1.0			
Coupling Characteristics	Output Terminal Capacitance	C_{OUT}	$V_{OFF}=50\text{ V}$ $f=1\text{ MHz}$	Typ.	pF	70	50	35	25
	Input-to-output Capacitance	C_{IO}	$f=1\text{ MHz}$	Typ.	pF	1.3			
	Turn-on Time *3	t_{ON}	$I_F=10\text{ mA}$	Typ.	ms	0.3			
				Max.		1.0			
	Turn-off Time *3	t_{OFF}	$I_{ON}=100\text{ mA}$	Typ.	ms	0.2			
				Max.		1.0			


*1 : Can correspond to special specification $I_{FA}<3.0\text{ mA}$ *2 : Can correspond to special specification $I_{OFF}<1.0\text{ nA}$ *3 : Can correspond to special specification $t_{ON} / t_{OFF}<0.5\text{ ms}$

TYPICAL CHARACTERISTICS


- Derating Factor of Continuous Forward Current

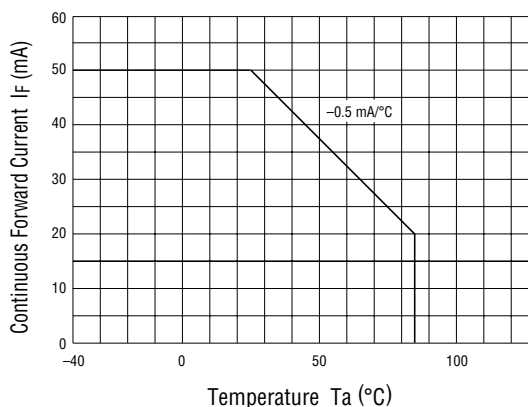


- Derating Factor of Load Current

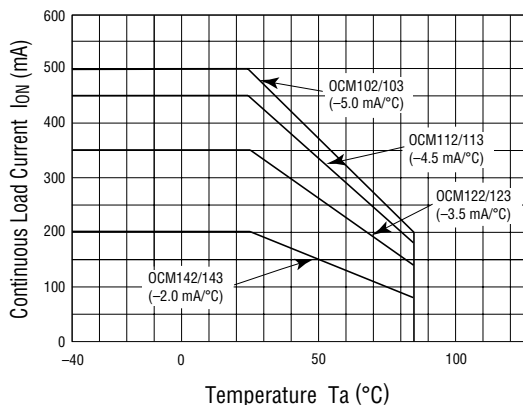


- Operation Input Current vs. Ambient Temperature

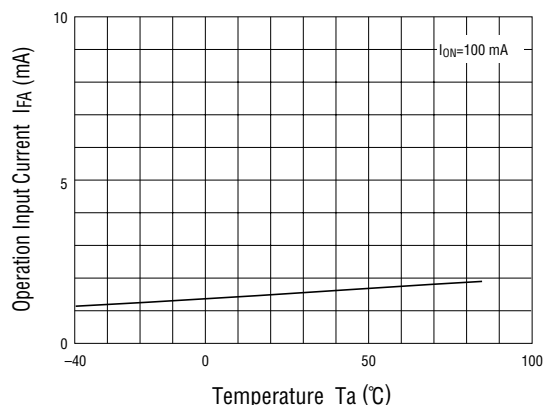


- Recovery Input Current vs. Ambient Temperature

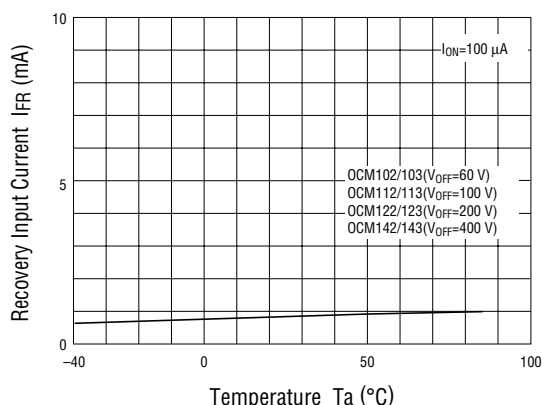

- On-resistance vs. Ambient Temperature 1

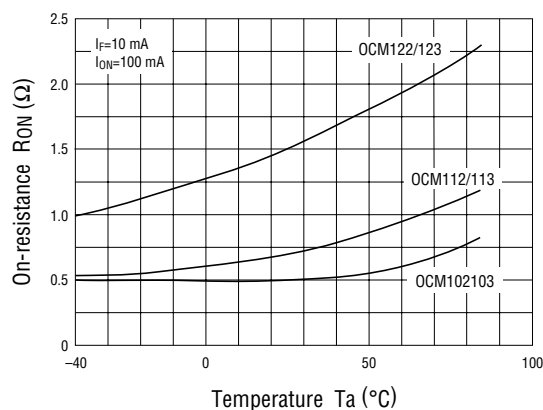


- On-resistance vs. Ambient Temperature 2

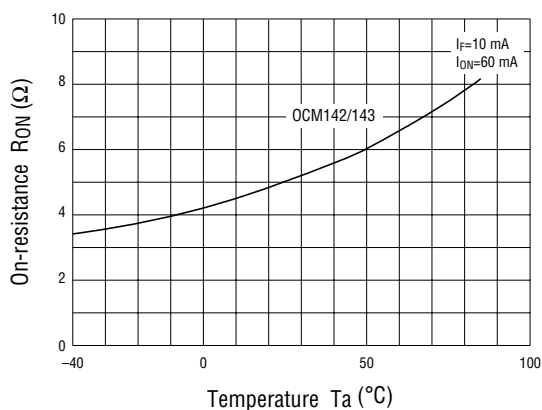


OPTICAL MOS RELAYS

OCM1□2, 1□3 Series


• Turn-on/Turn-off Time vs. Ambient Temperature

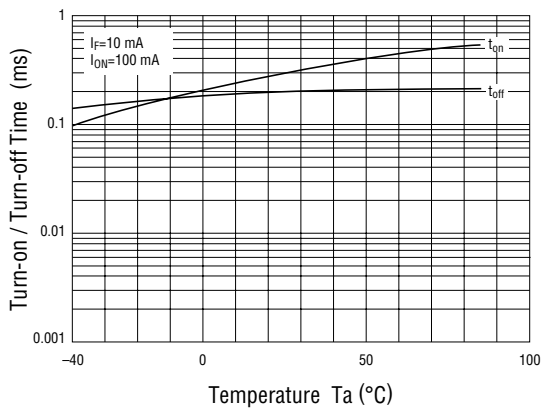


• Off-state Leakage Current vs. Ambient Temperature

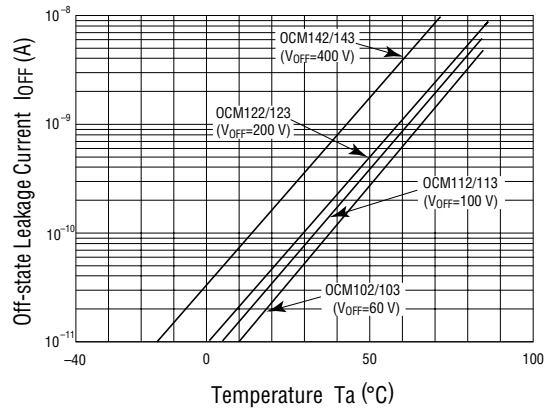


• Continuous Forward Current vs. On-resistance 1

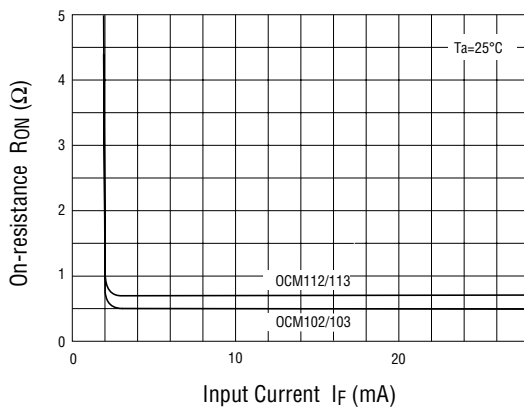


• Continuous Forward Current vs. On-resistance 2

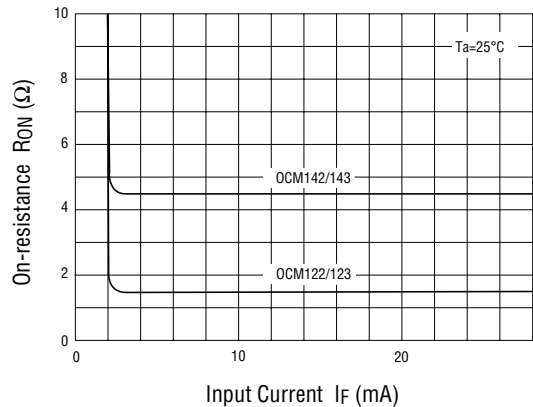


• Continuous Forward Current vs. Turn-on/Turn-off Time

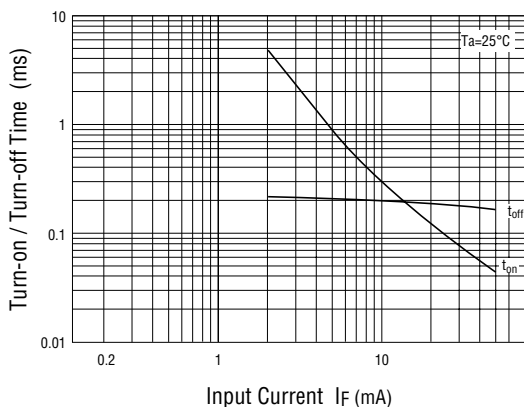

• Output Terminal Capacitance vs. Applied Voltage

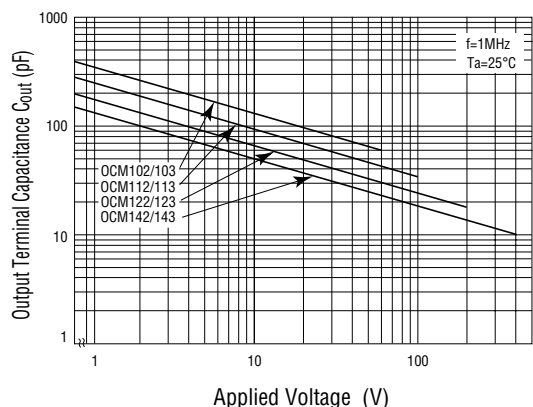

- Load Current vs. Voltage**

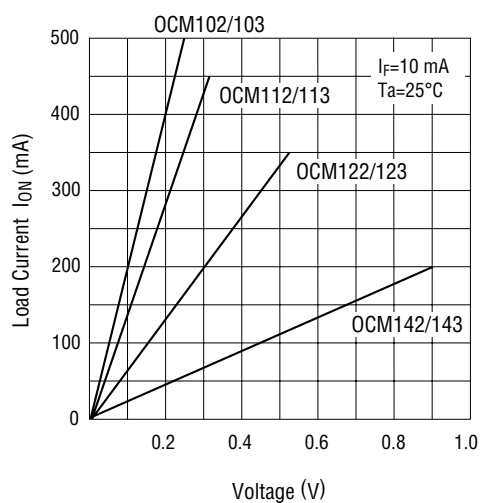

- Example Circuit for Measuring Turn-on/Turn-off Time**

