

Specification


Technical

SO2-AE Sulfur Dioxide Sensor High Concentration



PATENTED

Figure 1 SO2-AE Schematic Diagram

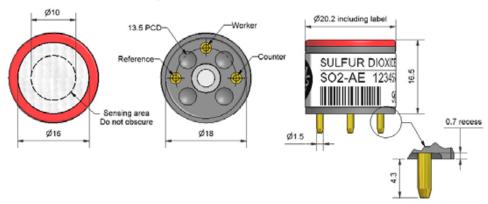

All dimensions in millimetres (± 0.1mm)

_	Top View		Bottom View	Side View	
	PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas range	nA/ppm in 400ppm SO ₂ t ₉₀ (s) from zero to 400ppm Soppm equivalent in zero air RMS noise (ppm equivalent) ppm limit of performance ward ppm error at full scale, linear a maximum ppm for stable response.	ranty t zero and 400ppm	55 to 80 < 25 < 5 < 1.5 2,000 0 to -80 10,000
	LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year ir % change/month in lab air, mo months until 80% original sign	nthly test	nd < 2 > 24
_	ENVIRONMENTA	LSensitivity @ -20°C Sensitivity @ 50°C Zero @ -20°C Zero @ 50°C	% (output @ -20°C/output @ 20°C) 400ppm % (output @ 50°C/output @ 20°C) 400ppm ppm equivalent change from 20°C ppm equivalent change from 20°C		80 to 92 98 to 108 < ± 7 < 0 to 7
_	CROSS SENSITIVITY	Filter capacity NO sensitivity NO ₂ sensitivity Cl ₂ sensitivity H ₂ sensitivity CO sensitivity C ₂ H ₄ sensitivity NH ₃ sensitivity	ppm·hrs % measured gas @ 500ppm % measured gas @ 10ppm % measured gas @ 10ppm % measured gas @ 400ppm % measured gas @ 400ppm % measured gas @ 1000ppm % measured gas @ 20ppm	H ₂ S NO NO ₂ CI ₂ H ₂ CO C ₂ H ₄ NH ₃	5,000 150 -140 nd nd nd 75 < 0.1
	KEY SPECIFICATIONS	Temperature range Pressure range Humidity range Storage period Load Resistor Weight	°C kPa % rh continuous months @ 3 to 20°C (stored in Ω (recommended) g	n sealed pot)	-30 to 50 80 to 120 15 to 90 6 10 to 47 < 6

NOTE: all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.



SO2-AE Performance Data

Figure 2 Sensitivity Temperature Dependence


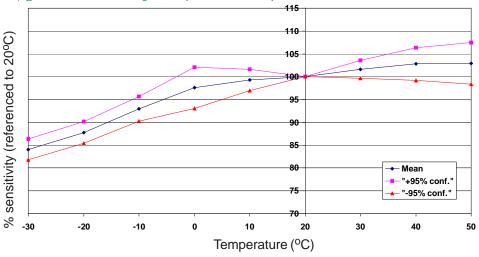


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and ± 95% confidence intervals are shown.

Figure 3 Zero Offset Temperature Dependence

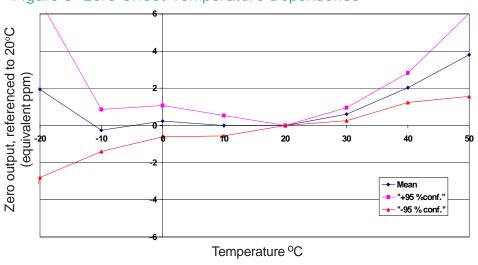

The zero offset is insensitive to temperature above -10°C.

Figure 4 Response to Step Changes up to 10,000 ppm SO₃

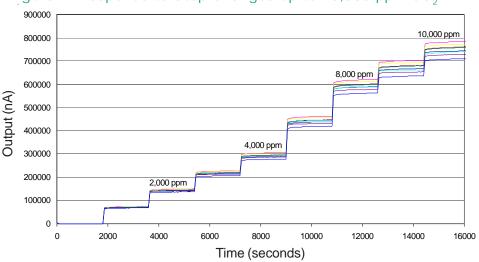


Figure 4 shows the response for a batch of sensors to high concentrations of SO_2 applied as sequential step increases.

The output remains substantially linear over the range 0 to 10,000 ppm.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For application notes visit "www.alphasense.com".