



DEVICE NUMBER : DHI-092-012 REV : 1.1
ECN : _____ PAGE : 1/6

Hall Integrated Circuit Sensor

MODEL NO : HI401/T19/S20

■ Features :

- 4V to 20V operation.
- High reliability.
- Small size.
- Output compatible with all digital logic families.
- Reverse voltage protection.

■ Description :

- The HI401/T19/S20 is a magnetic sensor used in electric commutation of DC brushless motor applications mostly. The HI401/T19/S20 has a latching behavior and requires a magnetic north and south pole for correct function. The output does not change if the magnetic field is removed. The sensor is designed for industrial and automotive applications and operates at as low as 4 volts.

■ Applications :

- Brushless DC motor.
- Rotation detection.
- Displacement detection.
- Speed sensing.

PART	CHIP	COLOR
	MATERIAL	
HALL IC	SI	BLACK



DEVICE NUMBER : DHI-092-012 REV : 1.1
ECN : PAGE : 2/6


Hall Integrated Circuit Sensor

MODEL NO : HI401/T19/S20



NOTES :

1. This drawing measure is a standard value.
All dimensions are in millimeter.
2. In case of designation is tolerance ± 0.3 mm.
3. Lead spacing is measured where the leads emerge from the package.
4. Protruded resin under flange 1.0mm Max.
5. Lens color: Black.
6. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
7. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT consent.
8. When using this produce, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

Package Dimension :

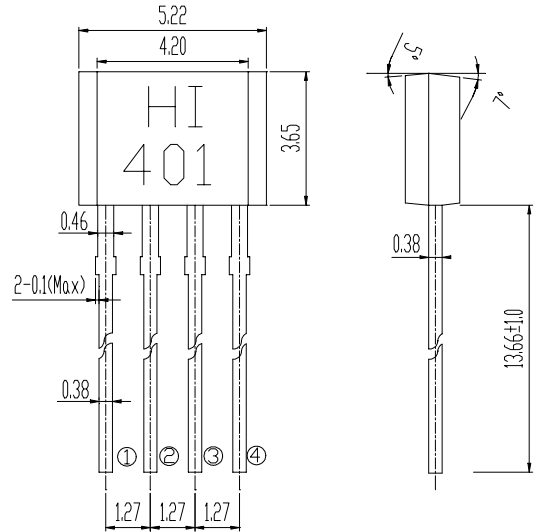

- ① Vcc
- ② Vout1
- ③ Vout2
- ④ GND

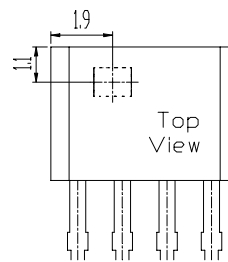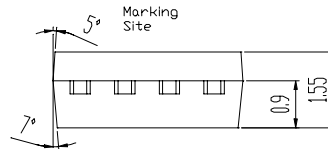

Location of Hall Sensor:
Reference of the top-left of package
X= 1.9 ± 0.1 mm
Y= 1.1 ± 0.1 mm



DEVICE NUMBER : DHI-092-012 REV : 1.1
 ECN : PAGE : 3/6

Hall Integrated Circuit SensorMODEL NO : HI401/T19/S20 **■ Absolute Maximum Ratings at T_A = 25°C**

Parameter	Symbol	Rating	Unit	Notice
Supply Voltage	V _{CC}	20	V	
Supply Current	I _{CC}	25	mA	
Output Current	I _{OUT}	Continuous 300 Hold 400 Peak(Start up) 600	mA	
Maximum Power Dissipation	P _D	500	mW	
Operating Ambient Temperature	T _A	-20 ~ +85	°C	
Storage Temperature	T _{STG}	-55 ~ +120	°C	
Soldering Temperature	T _{SOL}	260	°C	1/16 inches from body for 5 seconds

■ Electronic Characteristics :**T_A = 25°C**

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Supply Voltage	V _{CC}	4	---	20	V	Operating
Output Saturation Voltage	V _{CE(SAT)}	---	250	600	mV	V _{CC} =14V I _{OUT} =400mA B>B _{OP}
Supply Current	I _{CC}	---	18	25	mA	V _{CC} =20V Output Open
Output Leakage Current	I _{LEAK}	---	---	10	μA	V _{CE} =14V V _{CC} =14V
Output Rise Time	t _r	---	3.0	10	μS	V _{CC} =14V, R _L =820Ω, C _L =20pF
Output Fall Time	t _f	---	0.3	1.5	μS	
Switch Time Differential	Δt	---	---	10	μS	

■ Magnetic Specification :**T_A = 25°C**Condition: V_{CC}=20V, B_S=MAX[ABS(B_{OP}), ABS(B_{RP})]

Unit: Gauss

Bin Number	Bin1	Bin2	Bin3	Bin4
B _S	<50	<85	<100	<150



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DHI-092-012 REV : 1.1
 ECN : _____ PAGE : 4/6

Hall Integrated Circuit Sensor

MODEL NO : HI401/T19/S20

Typical Characteristics Curves:

Fig. 1 Supply Current V.S. Supply Voltage

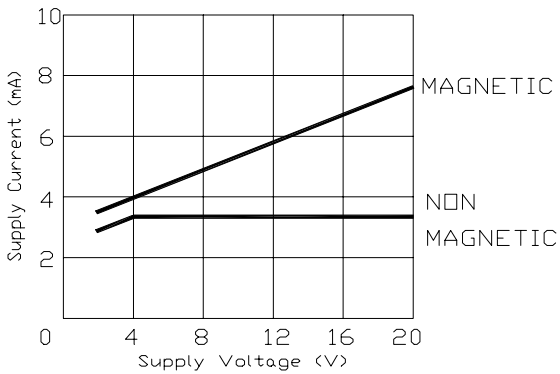


Fig. 2 Output Low Voltage V.S. Supply Voltage

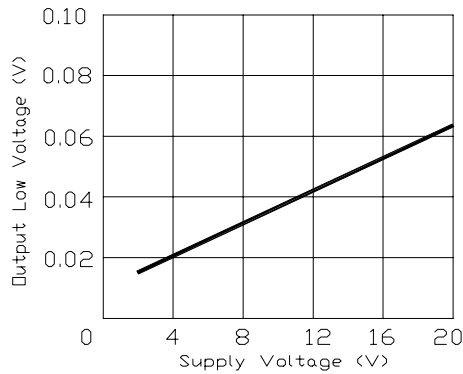


Fig. 3 Switch Points (Bop,Brp) V.S. Supply Voltage

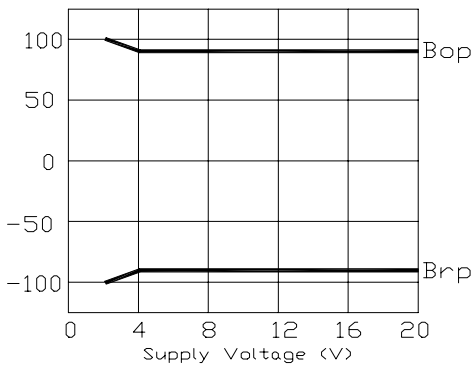


Fig. 4 Switch Points V.S. Ambient Temperature

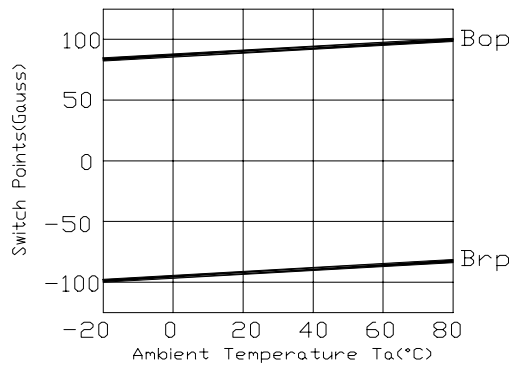


Fig. 5 Supply Current V.S. Ambient Temperature


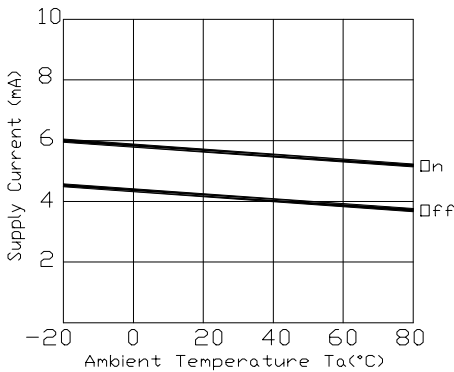



Fig. 6 Hysteresis Deviation V.S. Ambient Temperature

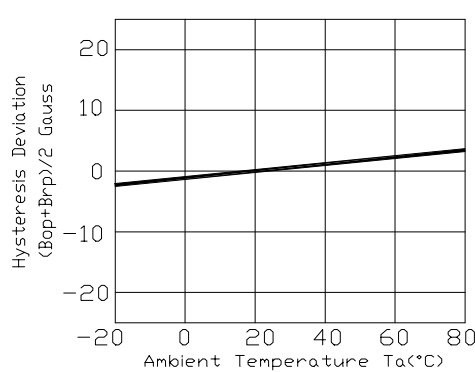


Hall Integrated Circuit Sensor

MODEL NO : HI401/T19/S20

Function Block Diagram :

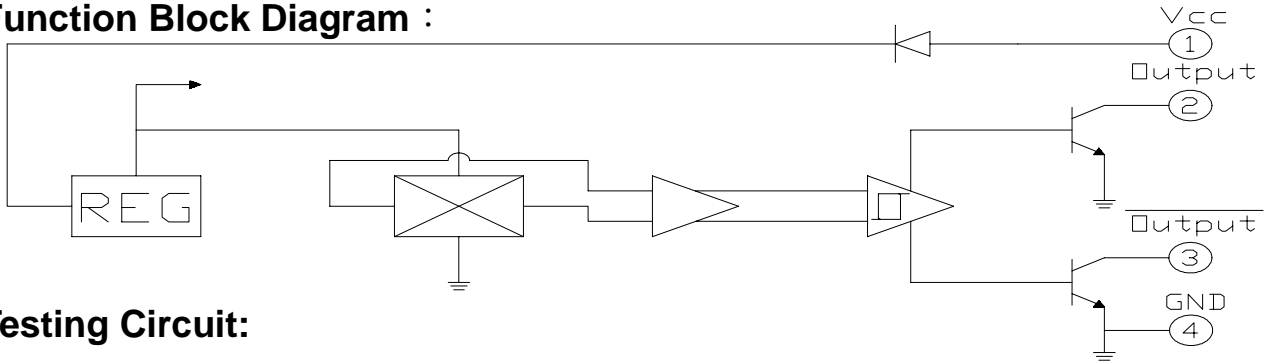

Testing Circuit:

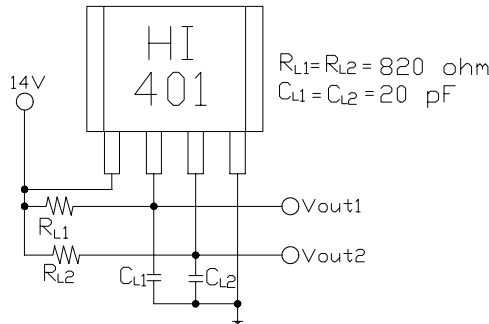

Reliability:

The reliability of products shall be satisfied with items listed below.
 Confidence level : 90% ; LTPD : 10%

Test Items	Test Conditions	Failure Judgement Criteria	Samples(n)
			Defective(c)
Operation life	Vcc=12V, Ta=25°C 1000hrs		n=22 , c=0
Temperature cycle	1 cycle -55°C to +85°C (30min)(5min)(30min) 50 cycle test	Bop <±20Gauss Brp <±20Gauss 0.8*L<ICC<1.2*U	n=22 , c=0
Thermal shock	-10°C to +100°C (5min) (10sec) (5min) 50 cycle test	V _{SAT} <1.5*U I _{LEAK} <1.5*U	n=22 , c=0
High temperature storage	Temp : +150°C 1000hrs	L : Lower Specification Limit	n=22 , c=0
Low temperature storage	Temp : -55°C 1000hrs		n=22 , c=0
High temperature High humidity	TA : 85°C RH : 85% 1000hrs	U : Upper Specification Limit	n=22 , c=0
Solder heat	Temp : 260 ± 10°C sec 4mm from the bottom of the package		n=22 , c=0



DEVICE NUMBER : DHI-092-012 REV : 1.1
ECN : _____ PAGE : 6/6


Hall Integrated Circuit Sensor

MODEL NO : HI401/T19/S20


■ Packing Specifications:

(UNIT : mm)


1.Bag:



3.Carton:

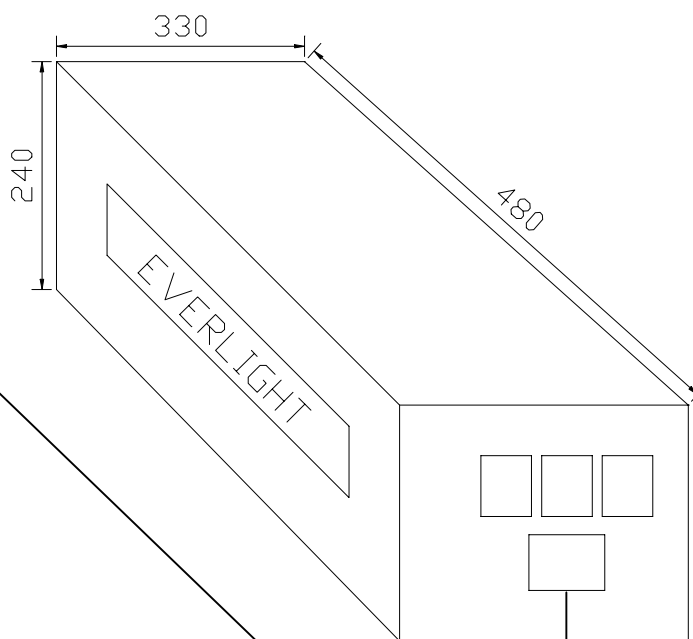

2.Box:

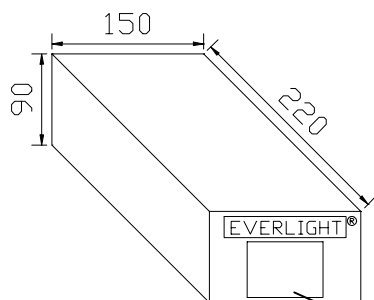

Label



■ Packing Quantity Specification:

- 1.1000Pcs/1Bag,10Bags/1Box
- 2.10Boxes/1Carton

■ Label Specification:

- CPN : Customer's Production Number
- P/N : Production Number
- QTY : Packing Quantity
- CAT : Ranks
- HUE : Reference
- REF : Reference
- LOT NO : Lot Number
- MADE IN TAIWAN : Production Place

CPN:

P/N:



HI401

QTY:



LOT NO:

CAT:

HUE:

REF:

MADE IN TAIWAN