

XFTC311 Miniature Load Cell



- 0-500N to 0-10kN [0-100Lbf to 2kLbf]
- Tension and/or Compression
- High Stiffness
- For Static and Dynamic Applications
- Threaded Male/Female Mechanical Fitting

DESCRIPTION

The XFTC311 series has been specifically developed to measure tension and compression in static and dynamic applications. The miniature size facilitates testing where space is at a premium. The sensing element is fitted with a fully temperature compensated Wheatstone bridge equipped with high stability micro-machined silicon strain gages. The use of silicon strain gages optimizes the load cell's performance at low ranges and frequencies. A strain relief spring strengthens the cable output. With two male/female threads, the XFTC311 is easily installed in industrial or OEM applications.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. often works with customers to design or customize sensors for specific uses and testing environments.

To meet your needs we also offer complete turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

FEATURES

- Male/female M5 and M10 threaded
- Tension and/or Compression
- Optional IP rating improvement
- Extended temperature use as option
- Optional improved global accuracy

APPLICATIONS

- Strain measurement on finger-like command
- Small size actuators
- Miniature press-fit device
- Robotics control measurement
- Laboratory

STANDARD RANGES

F.S. Ranges in N	500-1k	2k	5k-10k
F.S. Ranges in Lbf	100-200	400	1k-2k
Stiffness in N/m	3×10^7	1×10^8	2×10^9 to 4×10^9
Stiffness in Lbf/ft	2.1×10^6 to 4.1×10^6	6.9×10^6	1.4×10^8 to 2.7×10^8
Materials	Aluminium	Stainless Steel	

XFTC311 Miniature Load Cell

PERFORMANCE SPECIFICATIONS

Ambient Temperature: 20±1°C (unless otherwise specified)

PARAMETERS	
Operating Temperature Range (OTR)	-40 to 120 °C [-40 to 248 °F]
Compensated Temperature Range (CTR)	0 to 60 °C [32 to 140 °F]
Zero Shift in CTR	<2% F.S. /60 °C [108 °F]
Sensitivity Shift in CTR	<2% of reading / 60°C [108 °F]
Range (F.S.)	0-500N to 0-10kN [0-100 Lbf to 0-2k Lbf]
Over-Range	
Without Damage	2 x F.S.
Without Destruction	3 x F.S.
Accuracy	
Linearity	≤±0.5%F.S.
Hysteresis	≤±0.5%F.S.

Electrical Characteristics



Model	XFTC311
Supply Outage	10Vdc
F.S. Output	100mV, 50mV for 100 Lbf model
Zero Offset	<±10mV
Input Impedance/Consumption	1000 to 3000Ω
Output Impedance	500 to 1000Ω
Insulation under 50Vdc	≥100MΩ

Notes

1. Shielded cable with 4 Teflon wires (AWG36/28), standard length 2 m [6.5 ft] with strain relief spring
2. Material: Body in stainless steel or aluminum alloy depending on F.S. ; Two male/female threaded studs M5 or [10-32 UNF], M10 or [3/8-24 UNF] (metric thread is standard)
3. Protection Index: IP50 (other levels available on request)

XFTC311 Miniature Load Cell

DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)

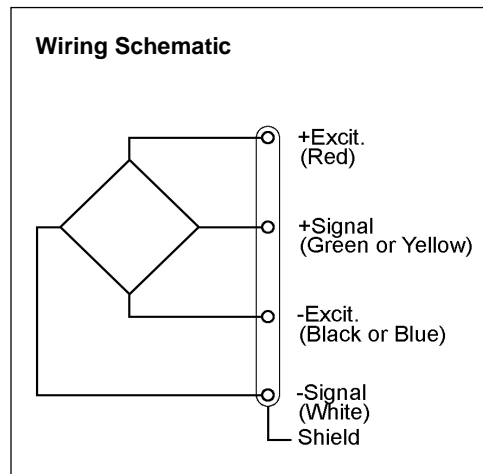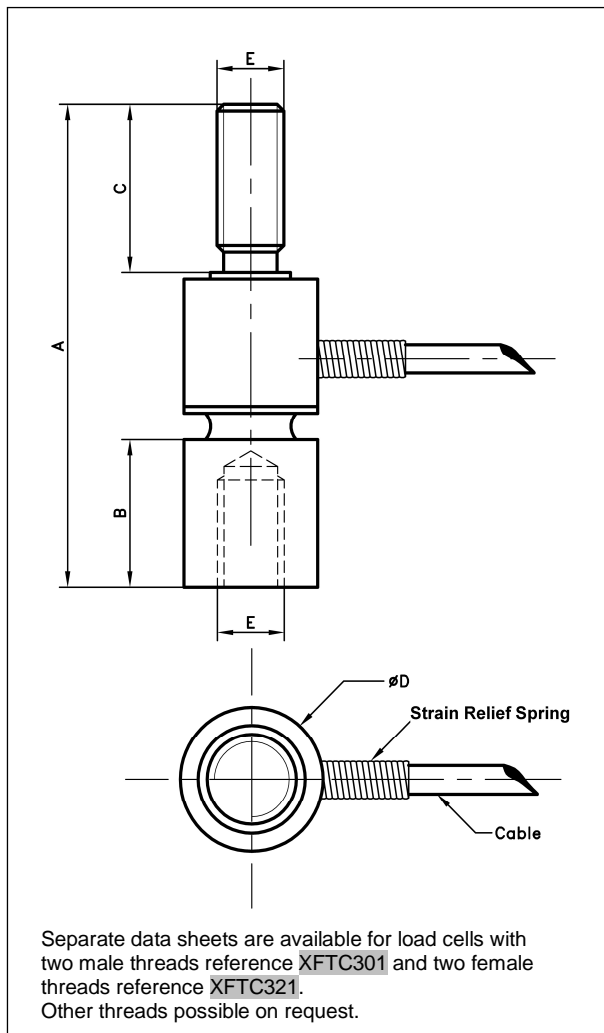

Dimensions in mm [inch]


Full Scale Range in N [in Lbf]	500 – 1000 [100 – 200]	2000 [400]	5000 – 10000 [1000 – 2000]
A	36 [1.42]		46 [1.81]
B	11 [0.43]		13 [0.51]
C	12.5 [0.49]		14 [0.55]
Ø D	10 [0.39]		16 [0.63]
E (Thread)	M5		M10
Material	Aluminium Alloy	Stainless Steel	
Stiffness in N/m	3×10^7	1×10^8	2×10^9 to 4×10^9
Stiffness in Lbf/ft	2.1×10^6 to 4.1×10^6	6.9×10^6	1.4×10^8 to 2.7×10^8

XFTC311 Miniature Load Cell

OPTIONS

ET1 : CTR -20 to 100 °C [-4 to 212 °F]
ET2 : CTR -40 to 120 °C [-40 to 248 °F]
ET3 : CTR -40 to 150 °C [-40 to 302 °F] stainless steel only OTR=CTR
HA : Accuracy (CNL&H) $\leq \pm 0.5\%$ F.S.
LC"x" : Additional cable length to standard length (in m) (Note : "X" = Custom value)

ORDERING INFO

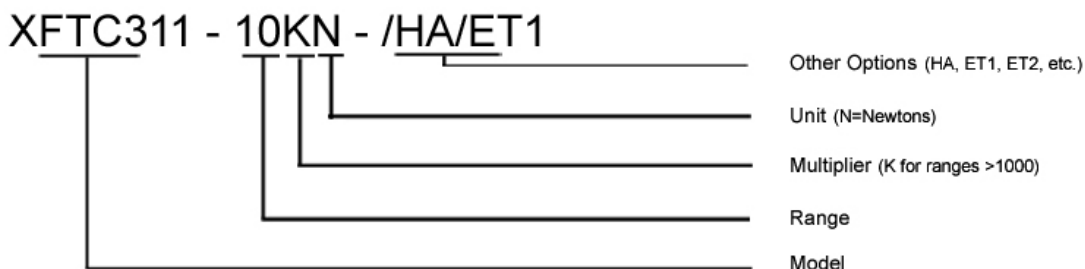

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.