



<h1>Nais</h1>	<h2>HALF-SIZE AUTOMOTIVE RELAY</h2>	<h1>JJM-RELAYS</h1>
---------------	---	---------------------

### FEATURES



mm inch

• **Compact (half-size).**  
The base area is approximately half the size of conventional (JSM) relays. The controller unit can be made more compact.  
Base area has been reduced by one half



• **Perfect for automobile electrical systems.**

Over  $2 \times 10^5$  openings possible with a 14 V DC motor load, an inrush current of 25 A, and steady state current of 5 A. (N.O. side)

• **Plastic sealed type.**  
Plastically sealed for automatic cleaning.

### SPECIFICATIONS

#### Contact

Arrangement		1 Form A	1 Form C
Contact material		Silver alloy	
Initial contact resistance, max. (By voltage drop 6V DC 1A)		100 mΩ	
Rating (resistive load)	Nominal switching capacity	20 A 14 V DC	20 A 14 V DC (N.O.) 10 A 14 V DC (N.C.)
	Max. switching power	400 W	
	Max. switching voltage	16 V DC	
	Max. carrying current	35 A (12V, at 20°C 68°F for 2 minutes) 25 A (12V, at 20°C 68°F for 1 hour) 30 A (12V, at 85°C 185°F for 2 minutes) 20 A (12V, at 85°C 185°F for 1 hour)	
Expected life (min. operations)	Mechanical (at 120cpm)		10 <sup>7</sup>
	Electrical (at rated load)	Resistive	10 <sup>5</sup> *1      10 <sup>5</sup> (N.O.)*2 10 <sup>5</sup> (N.C.)*3
		Motor load	2×10 <sup>5</sup> *4      2×10 <sup>5</sup> (N.O.)*6 5×10 <sup>4</sup> *5      5×10 <sup>4</sup> (N.O.)*7 2×10 <sup>5</sup> (N.C.)*8

#### Coil

Nominal operating power	640 mW
-------------------------	--------

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*1 at 20 A 14 V DC, at 20 cpm
- \*2 at 20 A 14 V DC
- \*3 at 10 A 14 V DC, at 20 cpm
- \*4 at 5 A (steady), 25 A (inrush) 14 V DC
- \*5 at 20 A 14 V DC (Motor lock), operating frequency: 0.5 s ON, 9.5 s OFF
- \*6 at 5 A (steady), 25 A (inrush) 14 V DC
- \*7 at 20 A 14 V DC (Motor lock)
- \*8 at peak 20 A 14 V DC (Braking current) operating frequency: 0.5 s ON, 9.5 s OFF

#### Characteristics

Max. operating speed (at rated load)		20 cpm
Initial insulation resistance*9		Min. 100 mΩ (at 500 V DC)
Initial breakdown voltage*10	Between open contacts	500 Vrms for 1min.
	Between contact and coil	500 Vrms for 1min.
Operate time*11 (at nominal voltage)		Max. 10 ms (at 20°C 68°F)
Release time (without diode)*11 (at nominal voltage)		Max. 10 ms (at 20°C 68°F)
Shock resistance	Functional*12	Min. 100 m/s <sup>2</sup> {10 G}
	Destructive*13	Min. 1,000 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional*14	10 to 100 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
	Destructive	10 to 100 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
Conditions in case of operation, transport and storage*15 (Not freezing and condensing at low temperature)	Ambient temp.	-40 to +85°C -40 to +185°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 5 g .176 oz

- \*9 Measurement at same location as "Initial break down voltage" section.
- \*10 Detection current: 10mA
- \*11 Excluding contact bounce time.
- \*12 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs
- \*13 Half-wave pulse of sine wave: 6 ms
- \*14 Detection time: 10 μs
- \*15 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61)

### TYPICAL APPLICATIONS

Power windows, auto door lock, electrically powered sun roof, electrically powered mirror, cornering lamp.

### ORDERING INFORMATION

Ex. JJM	1a	-	12 V
Contact arrangement		Coil voltage(DC)	
1a: 1 Form A 1: 1 Form C		12 V	

(Note) Standard packing: Carton: 50 pcs.; Case: 1,000 pcs.



JJM

# TYPES AND COIL DATA (at 20°C 68°F)

Contact arrangement	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Coil resistance $\Omega$ ( $\pm 10\%$ )	Nominal operating current mA ( $\pm 10\%$ )	Nominal operating power mW	Usable voltage range, V DC
1 Form A	JJM1a-12 V	12	(Initial) 7.2	(Initial) 1.0	225	53.3	640	10 to 16
1 Form C	JJM1-12 V	12	(Initial) 7.2	(Initial) 1.0	225	53.3	640	10 to 16



## DIMENSIONS

mm inch


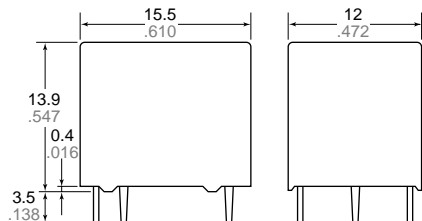


Note: \*Marked terminal is only for 1Form C type

Schematic (Bottom view)



PC board pattern (Bottom view)



**Dimension:**

Max. 1mm .039 inch:  
1 to 3mm .039 to .118 inch:  
Min. 3mm .118 inch:

**General tolerance**


$\pm 0.1 \pm 0.04$   
 $\pm 0.2 \pm 0.08$   
 $\pm 0.3 \pm 0.12$

Tolerance:  $\pm 0.1 \pm 0.04$

## REFERENCE DATA


### 1. Coil temperature rise

Tested sample: JJM1-12V, 6pcs  
Point measured: Inside the coil  
Contact current: Now current through contact, 5A, 10A, 15A, 20A  
Resistance method, ambient temperature 85°C 185°F

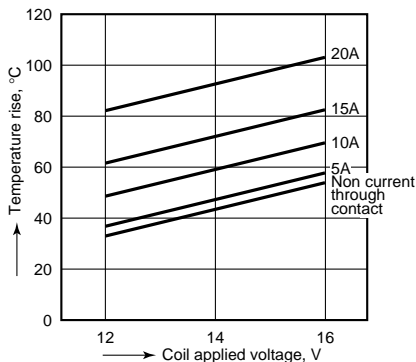

### 2-(1). Electrical life test (at rated load)

Tested Sample: JJM1-12V  
Quantity: n = 6 (NC = 3, NO = 3)  
Load: Resistive load  
(NC side: 2A 14 V DC, NO side: 5 A 14 V DC)  
Operating frequency: ON 1.5s, OFF 1.5s


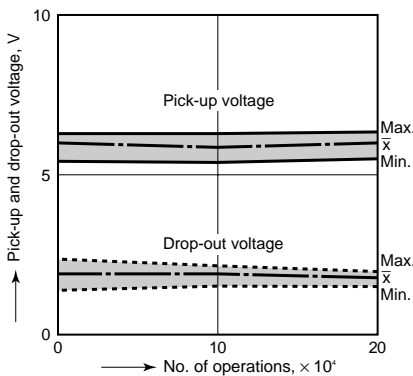


Contact welding: 0 time  
Miscontact: 0 time

### 2-(2). Electrical life test (Motor free)

Tested Sample: JJM1-12V, 2pcs.  
Load: 5A, Inrush 25A, Brake current 18A, Power window motor load (Free condition).  
Operating frequency: ON 0.5s, OFF 9.5s

Circuit :

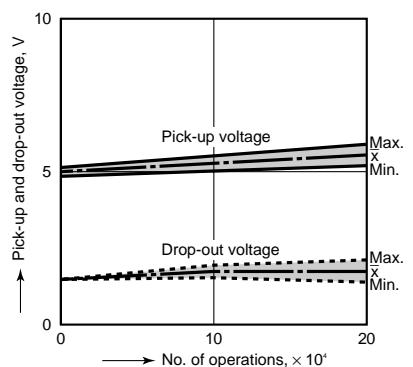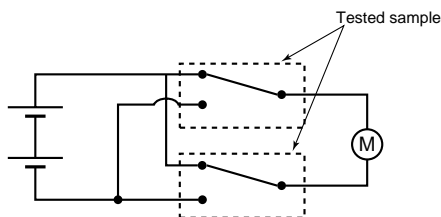

Contact welding: 0 time  
Miscontact: 0 time

2-(3). Electrical life test (Motor lock)



Tested sample: JJM1-12V, 6pcs.

Load: 20A, 14VDC,

Power window motor load  
(lock condition).

Operating frequency: ON 1s, OFF 5s

Circuit :

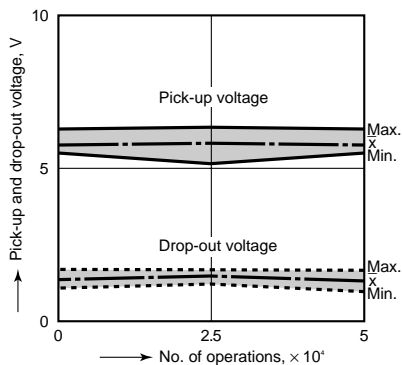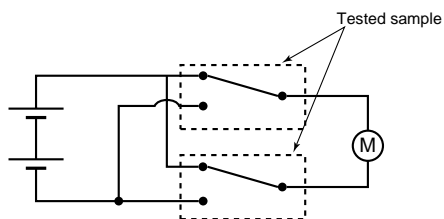

Contact welding: 0 time  
Miscontact: 0 time

**For Cautions for use, see Relay Technical Information (Page 48 to 76).**