

Ozone

SensoriC O3 3E 1 F



SensoriC O3 3E 1 F

FEATURES

Amperometric 3 electrode sensor cell
Long life time
High reliability
Fast response
Fixed organic gel electrolyte

TYPICAL APPLICATIONS

Environmental monitoring
Indoor Air Quality, water treatment plants

PART NUMBER INFORMATION

MINI	1531-231-30009
SENSORIC CLASSIC	1531-231-30069
CTL 4 series adaptation	1531-231-30049
CTL 7 series adaptation	1531-231-30079

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Rev. 09/2006

SensoriC O3 3E 1 F

TECHNICAL SPECIFICATIONS

Measuring Range	0–1 ppm
Sensitivity Range	450 +/- 150 nA/ppm (negative signal)
Zero Current at 20°C	< ± 10 nA
Resolution at 20°C	< 0.03 ppm
Bias Potential	0 mV
Linearity	< 10% full scale
Response Time at 20°C	
t50	< 15 s calculated from 3 min. exposure time ¹⁾
t90	< 60 s calculated from 3 min. exposure time ¹⁾
Long Term Sensitivity Drift	< 5% per month ²⁾
Operation Conditions	
Temperature Range	-20°C to +40°C
Humidity Range	15–90% r.H., non–condensing
Effect of Humidity	abrupt changes will cause a short term drift
Sensor Life Expectancy	> 18 months
Warranty	12 months

1) At approx. 200 ccm/ min. (tolerance range to t_{90} : 30 to 60 sec.; depend on air velocity; minimum gas flow 5 l/h)

2) At 20°C and 30-50% r.H.; Sensitivity might increase over life time depending on application; high air flow conditions might effect life time


SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Rev. 09/2006

SensoriC O3 3E 1 F

OUTPUT vs. TEMPERATURE:

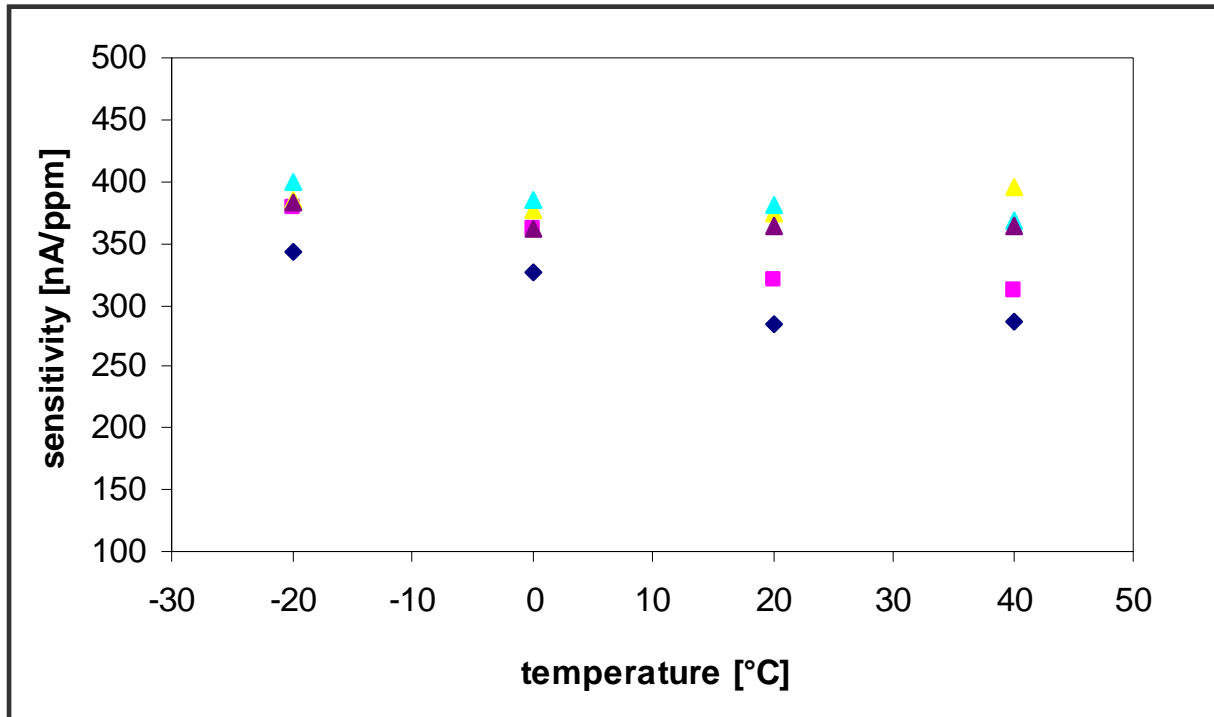

ZERO READING vs. TEMPERATURE:

no effect

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Rev. 09/2006

SensoriC O3 3E 1 F

CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Bromine, Iodine		yes; n/d
Carbon Dioxide	5000 ppm	0
Carbon Monoxide	100 ppm	0
Chlorine	1 ppm	1.2
Chlorine Dioxide	1 ppm	1.5
Hydrazine	3 ppm	-3
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	-1.6 ¹⁾
Nitrogen	100 %	0
Nitrogen Dioxide	10 ppm	6

1) Continuous exposure at ppm level over more than 30 min. might blind the sensor.

Notes:

1. Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Rev. 09/2006