Tetrahydrothiophene

SensoriC THT 3E 50



FEATURES

Amperometric 3 electrode sensor cell Fast response High reliability Good long term stability

TYPICAL APPLICATIONS

Monitoring of odorants in natural gas applications

PART NUMBER INFORMATION

 SENSORIC CLASSIC
 2345-034-11069

 CTL 4 series adaptation
 2345-034-14049

 CTL 7 series adaptation
 2345-034-17079



TECHNICAL SPECIFICATIONS

Measuring Range 0–50 mg/m3

Sensitivity Range 140 nA/ mg/m 3 ± 50 nA/ mg/m3

Zero Current at 20° C $\times \pm 200$ nA Resolution at 20° C $\times 1.5$ mg/m3 High Potential $\times 150$ mV Linearity $\times 150$ full scale

Response Time at 20°C

t50
 t50
 t90
 t90

Long Term Sensitivity Drift < 10% per 6 months

Operation Conditions

Temperature Range -10°C to +40°C

Humidity Range 15–90% r.H., non–condensing


Effect of Humidity no effect

Sensor Life Expectancy > 18 months Warranty 12 months

Note: 1 ppm = 3,66 mg/m3




OUTPUT vs. TEMPERATURE:

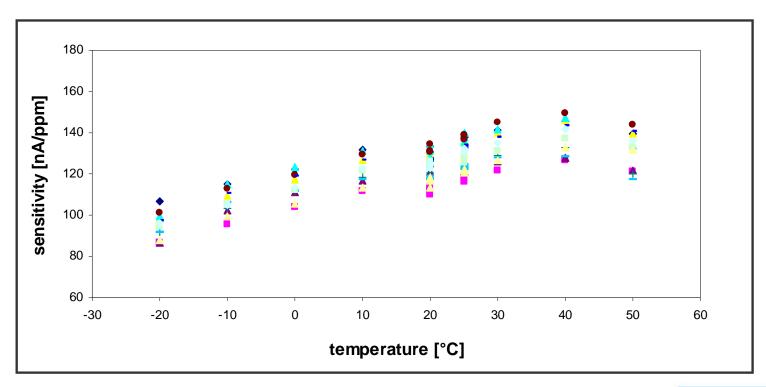



ZERO READING vs. TEMPERATURE:

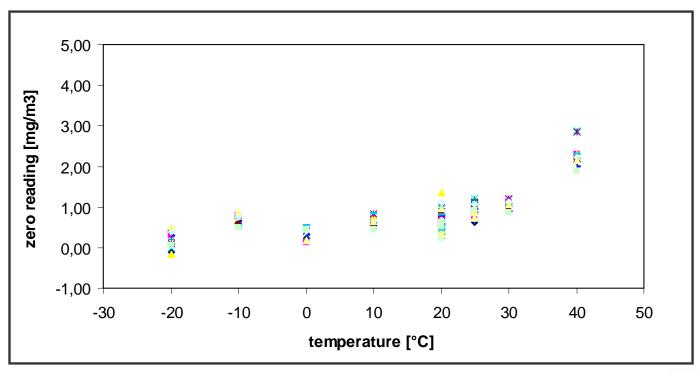



CROSS SENSITIVITIES AT 20°C

Concentration	Reading [mg/m3]
5000 ppm	0
100 ppm	2
1 %	10
1 %	yes; n/d
% range	0
1 %	0
20 ppm	01
200 ppm	400
100 %	0
100 %	0
10 mg/m3	10
	5000 ppm 100 ppm 1 % 1 % % range 1 % 20 ppm 200 ppm 100 %

¹⁾ With inboard filter; to remove TLV levels of interfering gases; continuous high level exposure may reduce the efficiency of the filter material.

Notes:

- 1. Interference factors may differ from sensor to sensor and with life time. It is not adviseable to calibrate with interference gases.
- 2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

