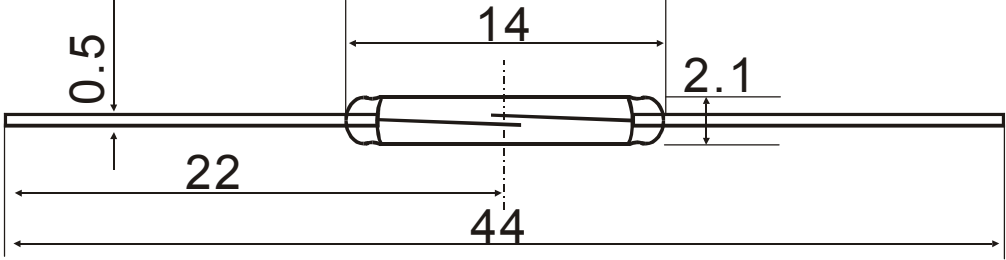


干簧开关---适用于普通低压电子产品	型号: MKA14103
<p>Dimensions</p> 	
符合欧盟环保“ROHS 指令”要求 <span style="float: right;">Unit:mm</span>	
Contact Form 触点形式	1A SPST-NO
Contact Material 触点材质	Ru
Max.Contact Rating 触点负载	10W
Max.Switching Voltage 最大开关电压	100VDC
Max.Switching Current 最大开关电流	0.5A/1.0A (峰值)
Max.Initial Contact Resistance 最大触点电阻(初始值)	100mΩ
Pull In Value(At) 启动值	10-15
Drop out Value(At) 释放值	5
Min.Breakdown Voltage 耐高压	220VDC(AT<25)
Max.Contact Capacitance 触点电容	0.7pF
Min.Insulation Resistance 绝缘电阻	$10^{10} \Omega$
Typ.Resonant Frequency 谐振频率	4KHZ
Operation Temperature 工作温度	-55℃~+120℃
Electrical Life (at Resistive Load) 电气寿命 (阻性负载)	$10^8$ (5 VDC,10mA)