


# CL2-D4 Chlorine Sensor

## Miniature Size



PATENTED

Figure 1 CL2-D4 Schematic Diagram

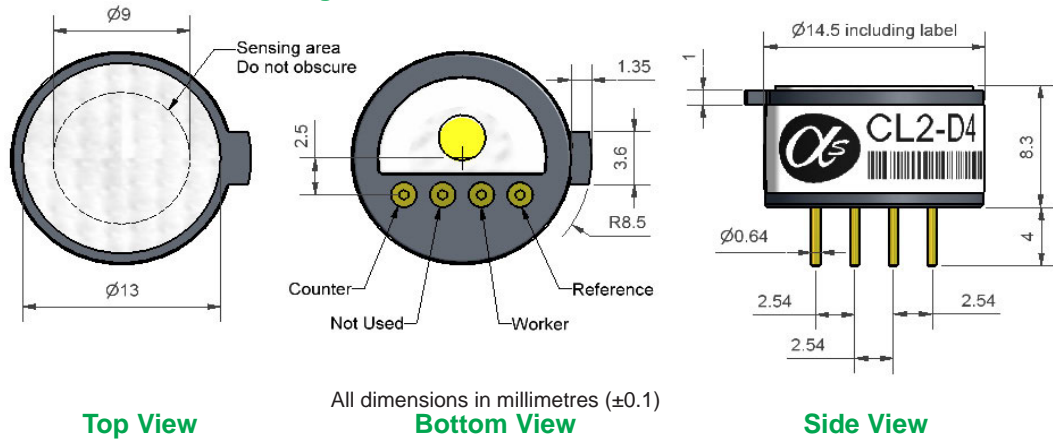

Technical Specification


<b>PERFORMANCE</b>	Sensitivity	nA/ppm in 10ppm Cl <sub>2</sub>	-200 to -375
	Response time	t <sub>90</sub> (s) from zero to 10ppm Cl <sub>2</sub>	< 35
	Zero current	ppm equivalent in zero air	$\pm 0.35$
	Resolution	RMS noise (ppm equivalent)	< 0.1
	Range	ppm Cl <sub>2</sub> limit of performance warranty	20
	Linearity	ppm error at full scale, linear at zero and 10ppm Cl <sub>2</sub>	$\pm 0.5$
	Overgas limit	maximum ppm for stable response to gas pulse	60
<b>LIFETIME</b>	Zero drift	ppm equivalent change/year in lab air	nd
	Sensitivity drift	% change/month in lab air, twice monthly test	nd
	Operating life	months until 80% original signal (24 month warranted)	> 24
<b>ENVIRONMENTAL</b>	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 10ppm Cl <sub>2</sub>	90 to 110
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 10ppm Cl <sub>2</sub>	110 to 130
	Zero @ -20°C	ppm equivalent change from 20°C	-0.4 to 0.4
	Zero @ 50°C	ppm equivalent change from 20°C	0 to 0.5
<b>CROSS SENSITIVITY</b>	H <sub>2</sub> S	sensitivity % measured gas @ 20ppm	< -20
	NO <sub>2</sub>	sensitivity % measured gas @ 10ppm	< 80
	NO	sensitivity % measured gas @ 50ppm	< 0.5
	SO <sub>2</sub>	sensitivity % measured gas @ 20ppm	< 1
	CO	sensitivity % measured gas @ 400ppm	< 0.1
	H <sub>2</sub>	sensitivity % measured gas @ 400ppm	< 0.1
	C <sub>2</sub> H <sub>4</sub>	sensitivity % measured gas @ 400ppm	< 0.1
NH <sub>3</sub>	sensitivity % measured gas @ 20ppm	< 0.1	
<b>KEY SPECIFICATIONS</b>	Temperature range	°C	-20 to 50
	Pressure range	kPa	80 to 120
	Humidity range	%rh (see note below)	15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Load resistor	Ω (for optimum performance)	33
	Weight	g	< 2

Note: Above 85% rh and 40°C a maximum continuous exposure period of 10 days is warranted. Where such exposure occurs the sensor will recover normal electrolyte volumes when allowed to rest at lower % rh and temperature levels for several days.



**NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

# CL2-D4 Performance Data



Technical Specification

Figure 2 Response to 10ppm Cl<sub>2</sub>

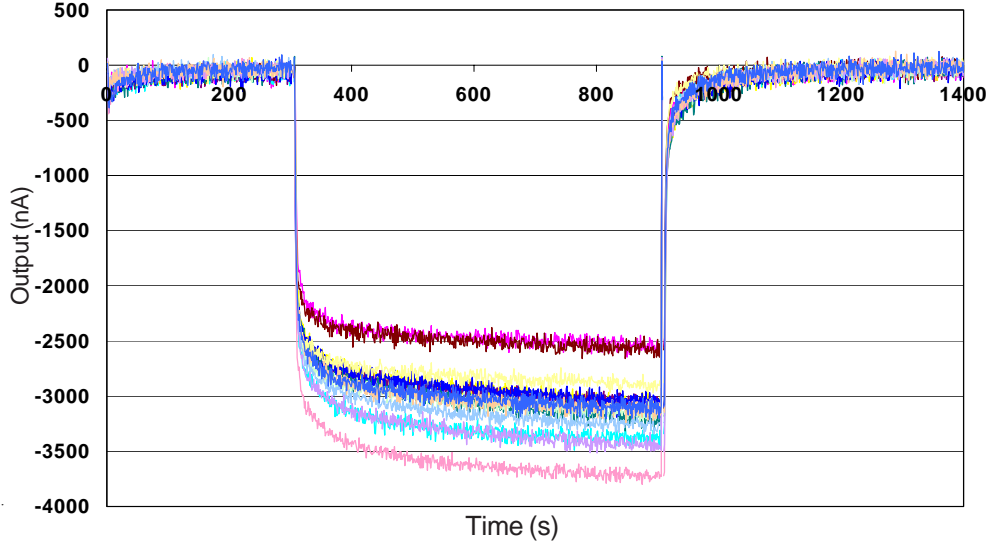


Figure 2 shows response to 10ppm Cl<sub>2</sub>.

This data is taken from a typical batch of sensors.

Figure 3 Zero Temperature Dependence

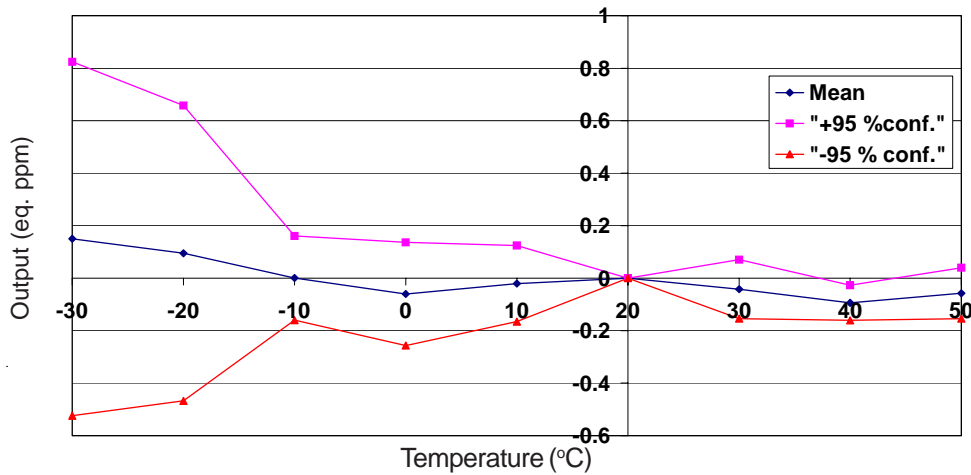


Figure 3 shows the variation in the zero by changes in temperature.

This data is taken from a typical batch of sensors. The mean and ±95% confidence intervals are shown.

Figure 4 Load Resistor Dependence

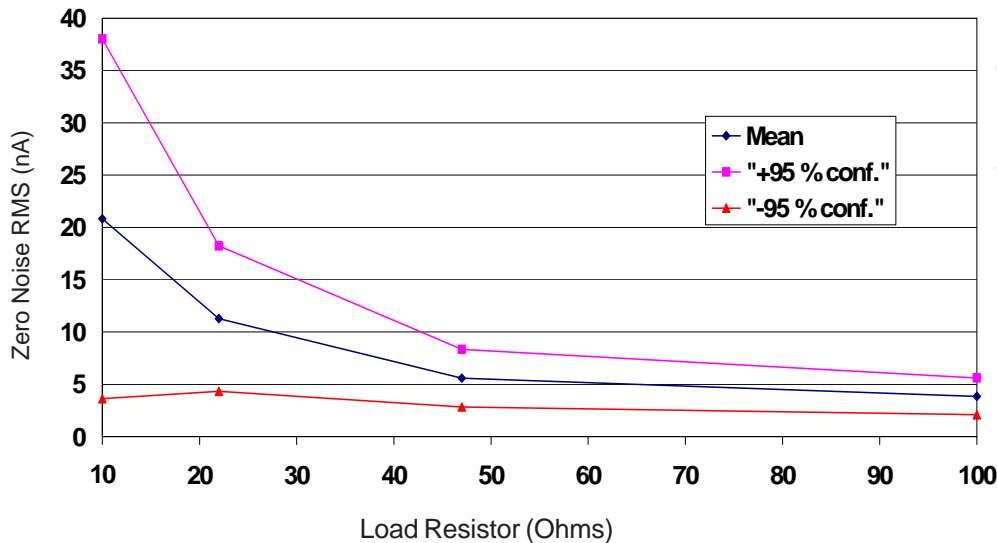


Figure 4 shows the effect of the load resistor on noise. Higher resistance reduces sensor noise, but also linearly increases response time.