



Comus Group of Companies

PRODUCT DATA SHEET

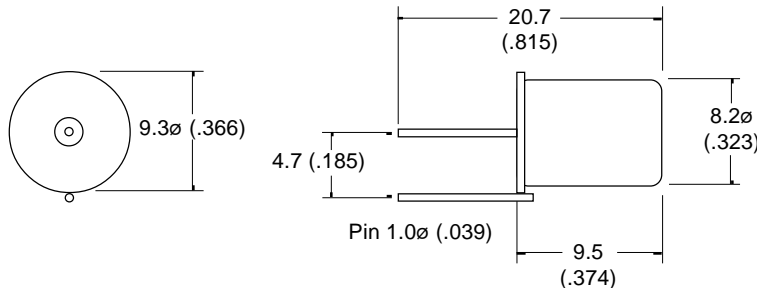

CONTACT FORM / STYLE



CM4400 switch is non-position sensitive.

Drawings not to scale
All dimensions in mm (inches) nominal

SPECIFICATION

CONTACT FORM/STYLE		See above
SWITCHING VOLTAGE	Max. Vac	240
SWITCHING CURRENT	Max. A	0.5
SWITCHING CAPACITY	Max. VA	100
CONTACT RESISTANCE	Max. mΩ	5
OPERATING TEMPERATURE	Deg. °C	-37° +100°
STORAGE TEMPERATURE	Deg. °C	-40° +125°
CASE MATERIAL		Steel-tin plated
CABLE/TERMINATION		Pin
FEATURES		Standard Omni-Directional

These switches contain toxic material and should not be opened.

NOTE: When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.

MOVEMENT / VIBRATION SWITCH - Mercury Contacts

PART NUMBER
CM 4400-1

Rev. No.	Revision Note	Date	Signature
C	Web Site 2001	1-2-01	RG

The Comus Group of Companies consist of:
Assembletech Europe Limited
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France
S.I.C.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.