


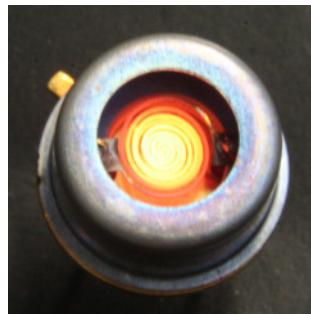

Infrared Spiral Wound Radiation Source JSIR450


Powerful radiation source with circular homogeneous temperature distribution for use with thermopiles and pyroelectric detectors in NDIR gas analysis and other applications.

Spectral Output Range ¹	typ. 0.8 ... 15	µm
Active Area	2.2 dia	mm ²
Hot Resistant	12±1	Ω
Time Constant	typ. 530	ms
Nominal Power Consumption	0.7	W
Operation Voltage ²	typ. 2.9	V
Operation Current ²	typ. 242	mA
Active Area Temperature ^{3,4}	650	°C
Filling Gas	-	
Filter	-	
Mass	~1	g
Housing	T039 (modified)	
Lifetime	> 50,000 h at 650°C	

¹ without window² with 12Ω³ at nominal power (0.7W)⁴ at T_{amb} = 25 °C

Pin Assignment

Bottom View



Absolute Max. Ratings

Power	1.7	W
Housing temperature	200	°C





Ordering Information

JSIR450



6350.01-3.01



Infrared Spiral Wound Radiation Source JSIR450

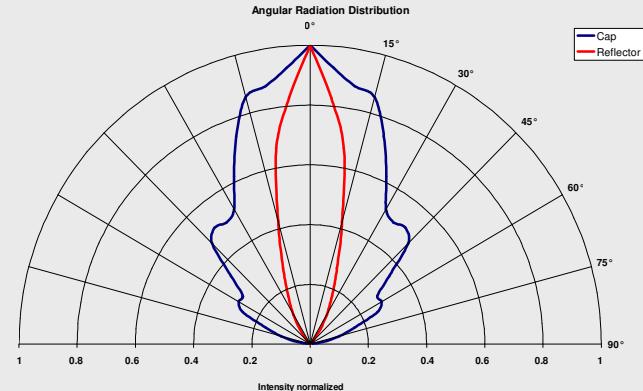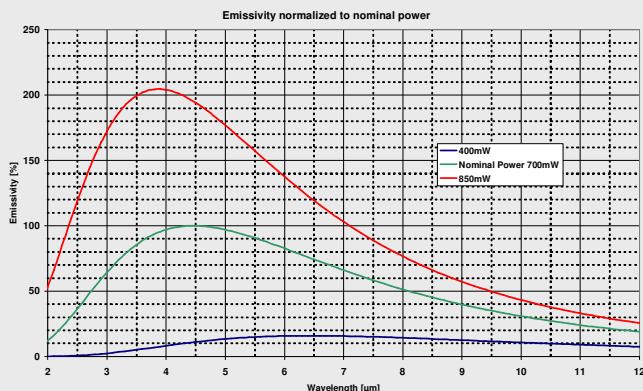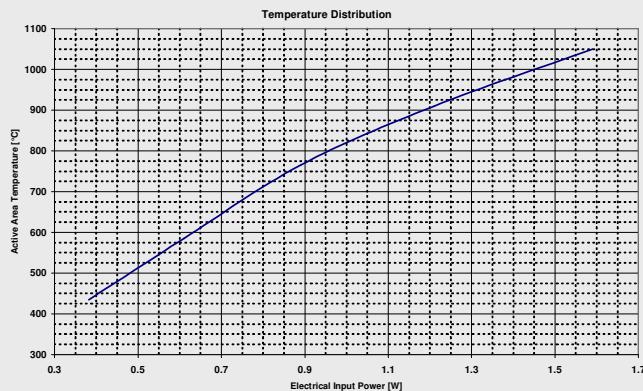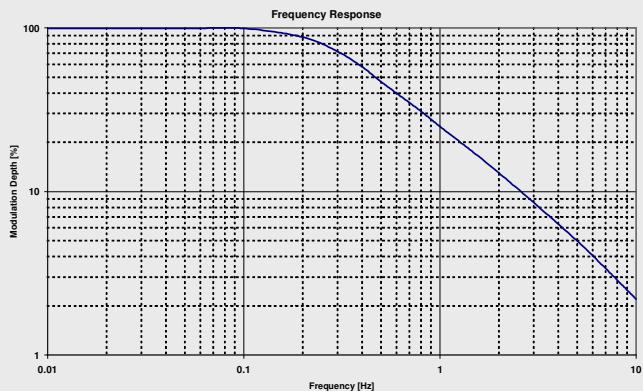

Housing

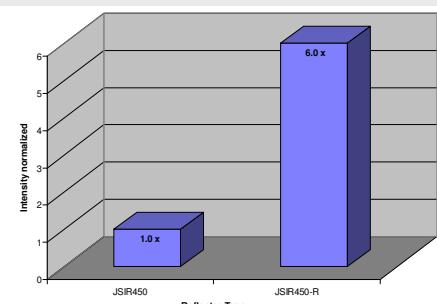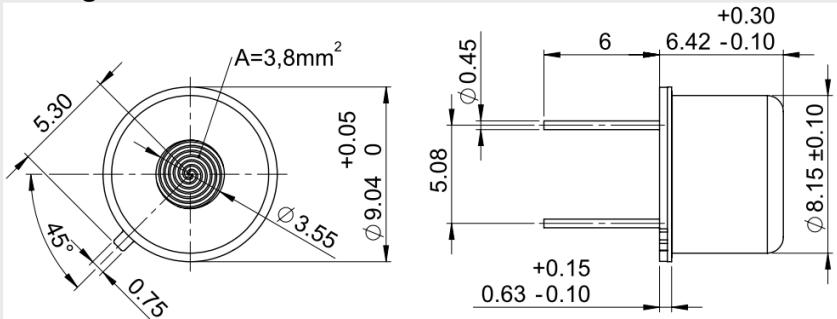

Optional parts

IR-Detector PS2x4V1- Pyroelectric dual-channel voltage mode detector CO₂/Ref
Art.-Nr. 4594.56-H.02

Evaluation Kit - For independent evaluation of emitters and detectors
Art.-Nr. 7206.01-A.00