



Integrated Optical Phase Modulator

Waveguide-based electro-optical light modulator



The Integrated Optical Phase Modulator is a compact fiber-coupled electro-optical modulator that works based on MgO:LiNbO₃ and LiNbO₃ crystals. Providing fast electro-optical response, it allows phase modulation with frequencies as high as the Gigahertz range. Available modulators can handle wavelengths in the visible and the infrared spectral range.

Standard-designed modulators use polarization maintaining single mode fibers to couple the light in and out. They may also be configured with fiber systems or connectors of different types. Each modulator may be fitted with an analog amplifier unit on special request.

Benefits

- Application in the VIS or IR spectrum
- High modulation frequencies
- Single mode fiber coupling
- Low modulation voltage

Applications

- Analog and digital modulation
- Sideband generation
- Interferometric metrology
- Optical coherence tomography


Integrated Optical Phase Modulator

Waveguide-based electro-optical light modulator

Specifications

Type	PM 532	PM 635	PM 830	PM 1064	PM 1550
Wavelength [nm]	532	635	830	1064	1550
Other wavelengths on request					
Spectral bandwidth [nm]	± 15	± 20	± 40	± 60	± 100
Insertion Loss, typical [dB]	7	6	5	4	3
Minimum optical rise time 10/90, typical	1 ns	200 ps	200 ps	200 ps	200 ps
Optical connection, input	Standard Fiber connector		Polarisation maintaining single mode fiber Bare fiber, FC/PC connector or FC/APC connector		
Optical connection, output	Standard Optional Fiber connector		Polarisation maintaining single mode fiber Single mode or multi mode fiber Bare fiber, FC/PC or FC/APC connector		
Half wave voltage, typical	4 V	6 V	6 V	6 V	10 V
Maximum optical input power (cw)	10 mW	30 mW	50 mW	300 mW	300 mW
Dimensions L x W x H (housing, without fiber feed-through)			96 mm x 19 mm x 10 mm		

Dimensions Phase Modulator

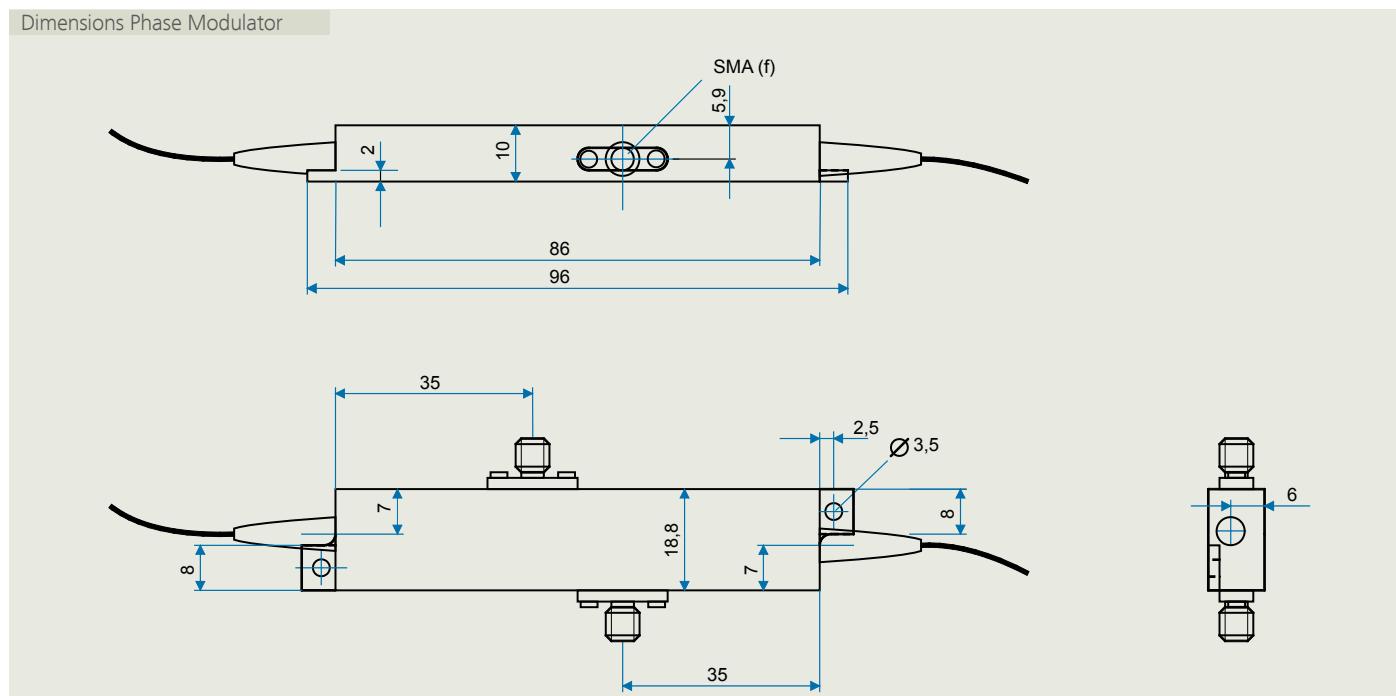

It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final and binding.