


Calibration Resistor

Model 1240

Code:	1240 EN
Delivery:	ex stock
Warranty:	24 months

With Certificate
according to ISO 9000

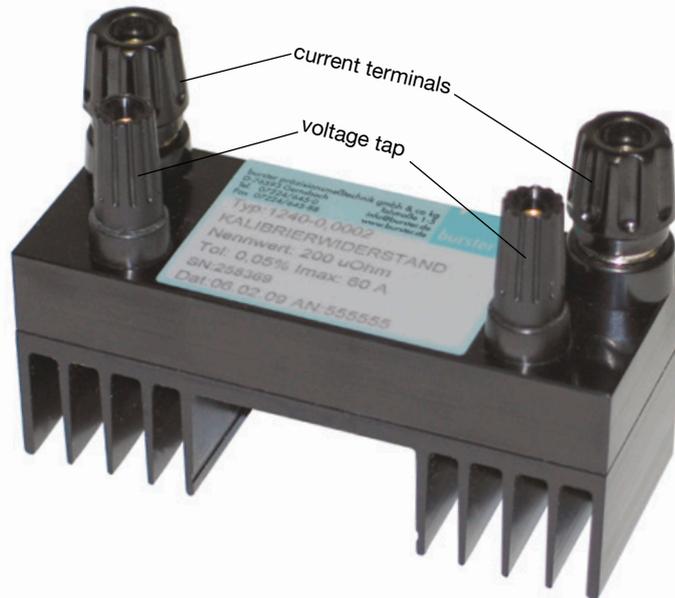

- Low capacitance and low inductance design
- Suitable for direct current and technical frequencies
- High stability $< \pm 0.01\%$ over years

Application

The 0.02 class calibration resistors excel in their modern design and small mechanical dimensions. Their ruggedness also ensures a long life.

Calibration resistors of the 1240 series are used wherever very constant operating standards are required. Typical main areas of application therefore include:

- ▶ When normal resistors prove to be too large scale
- ▶ For test and calibration of resistance measurement devices
- ▶ For tests on electrical temperature measuring equipment
- ▶ For laboratory setup of a Wheatstone bridge
- ▶ As shunt resistor for accurate current measurement
- ▶ As part of standard equipment in research laboratories
- ▶ For a large part of measurements in calibration laboratory

A test certificate according to ISO 9000 with detailed technical data is included in the scope of delivery of these high-quality calibration resistors.

DKD/DAkKS Calibration Certificate

The calibration laboratory D-K-15141-01-00 at burster praezisionsmesstechnik gmbh & co kg is supervised by DAkKS (Deutsche Akkreditierungsstelle GmbH) according to ISO 17025.

It can prove its status by a certificate and is authorized to issue calibration certificates with the DAkKS logo and with the DKD logo (Deutscher Kalibrierdienst).

These calibration certificates are internationally approved by multilateral contracts.

Manufacturer Calibration Certificate

Please refer to DKD/DAkKS Calibration Certificate but with reduced accuracy. The calibration resistors can also be delivered with a manufacturer calibration certificate. It confirms the traceability of the used secondary voltage and resistance standards to the national standards according to DIN ISO 9000ff and is guaranteed by our certified calibration laboratory (D-K-15141-01-00)

1240 EN

Technical Data

Resistance material: 25 $\mu\Omega$... 100 m Ω MANGANIN® sheet
 200 m Ω ... 100 k Ω ZERANIN® wire

Temperature coefficient: approx. ± 10 ppm/K MANGANIN® sheet
 approx. ± 2 ppm/K ZERANIN® wire

Calibration temperature: 23 °C ± 3 K (< 0.5 W load)

Surface temperature: max. 85 °C

Thermal resistance: 11 K/W

Test voltage: 2900 VDC (resistance element-housing)

Nominal insulation voltage: 650 VDC (insulated mounting required)

Insulation resistance: > 100 M Ω


Specifications: according IEC 60477

Dimensions 100 $\mu\Omega$... 100 K Ω : (H x W x D) 97 x 38 x 61 [mm]
 25 $\mu\Omega$: (H x W x D) 97 x 38 x 81 [mm]

Weight 100 $\mu\Omega$... 100 K Ω : 250 g
 25 $\mu\Omega$: 400 g

Adapter model 2394

for the check-up and calibration of our resistance measurement devices models 2304 and 2316-V000X

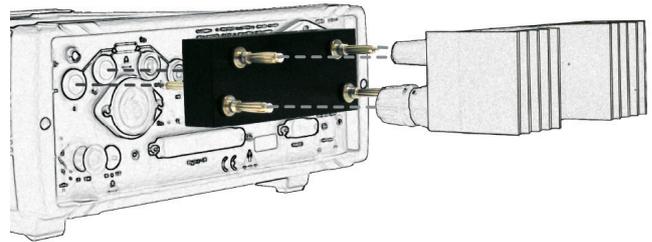

Model	Resistance value*	Tolerance \pm %	R_L	Resistivity material	Max. current in air	Nominal voltage at voltage taps	Storage stability typ./year
1240-0.000025	25 $\mu\Omega$	1	≤ 0.6 m Ω	MANGANIN® sheet	60 A	1.5 mV	$< 4 \times 10^{-4}$
1240-0.0001	100 $\mu\Omega$	0.1	≤ 0.9 m Ω		60 A	6 mV	$< 4 \times 10^{-4}$
1240-0.0002	200 $\mu\Omega$	0.05	≤ 0.8 m Ω		60 A	12 mV	$< 4 \times 10^{-4}$
1240-0.0005	500 $\mu\Omega$	0.05	≤ 1.5 m Ω		60 A	30 mV	$< 4 \times 10^{-4}$
1240-0.001	1 m Ω	0.05	≤ 4 m Ω		30 A	30 mV	$< 5 \times 10^{-5}$
1240-0.002	2 m Ω	0.05	≤ 4 m Ω		30 A	60 mV	$< 5 \times 10^{-5}$
1240-0.005	5 m Ω	0.05	≤ 4 m Ω		20 A	100 mV	$< 5 \times 10^{-5}$
1240-0.01	10 m Ω	0.03	≤ 5 m Ω		14 A	140 mV	$< 5 \times 10^{-5}$
1240-0.02	20 m Ω	0.03	≤ 5 m Ω		10 A	200 mV	$< 5 \times 10^{-5}$
1240-0.05	50 m Ω	0.03	≤ 7 m Ω		6 A	300 mV	$< 5 \times 10^{-5}$
1240-0.1	100 m Ω	0.02	≤ 8 m Ω	ZERANIN® wire	5 A	500 mV	$< 3 \times 10^{-5}$
1240-0.2	200 m Ω	0.02	≤ 5 m Ω		3 A	600 mV	$< 2 \times 10^{-5}$
1240-0.5	500 m Ω	0.02	≤ 5 m Ω		2 A	1 V	$< 2 \times 10^{-5}$
1240-1	1 Ω	0.02	≤ 5 m Ω		1.5 A	1.5 V	$< 1 \times 10^{-5}$
1240-2	2 Ω	0.02			1 A	2 V	$< 2 \times 10^{-5}$
1240-5	5 Ω	0.02			0.7 A	3.5 V	$< 2 \times 10^{-5}$
1240-10	10 Ω	0.02			0.5 A	5 V	$< 1 \times 10^{-5}$
1240-20	20 Ω	0.02			0.35 A	7 V	$< 2 \times 10^{-5}$
1240-50	50 Ω	0.02			0.2 A	10 V	$< 2 \times 10^{-5}$
1240-100	100 Ω	0.02			0.15 A	15 V	$< 1 \times 10^{-5}$
1240-200	200 Ω	0.02			0.1 A	20 V	$< 2 \times 10^{-5}$
1240-500	500 Ω	0.02			70 mA	35 V	$< 2 \times 10^{-5}$
1240-1 k	1 k Ω	0.02			45 mA	45 V	$< 1 \times 10^{-5}$
1240-2 k	2 k Ω	0.02			20 mA	40 V	$< 2 \times 10^{-5}$
1240-5 k	5 k Ω	0.02			14 mA	70 V	$< 2 \times 10^{-5}$
1240-10 k	10 k Ω	0.02			10 mA	100 V	$< 1 \times 10^{-5}$
1240-20 k	20 k Ω	0.02		7 mA	140 V	$< 2 \times 10^{-5}$	
1240-50 k	50 k Ω	0.02		4 mA	200 V	$< 3 \times 10^{-5}$	
1240-100 k	100 k Ω	0.02		3 mA	300 V	$< 3 \times 10^{-5}$	

*all resistors are incl. test certificate. Intermediate values are possible at extra charge

Order Information

Calibration Resistor 100 m Ω Order code 1240-0.1
 DKD/DAkKS Calibration Certificate Order code 12DKD-1240
 Manufacturer Calibration Certificate Order code 12WKS-1240

