

## High Precision Pressure Sensor

For measurement of absolute pressure

Model 8264 "TJE"

For measurement against atmosphere

Model 8267 "TJE"

Code:	8264 EN
Delivery:	ex stock
Warranty:	24 months



- Measuring ranges between 0 ... 100 mbar to 0 ... 2000 bar
- Accuracy < 0.1 %
- Output 0 ... 5 V or 4 ... 20 mA available
- Suitable for liquid and gaseous media
- For dynamic and static measurements
- Made of stainless steel

### Application

High-precision pressure transducers of these models are a very attractive and economic solution for making extremely accurate pressure measurements for users from all fields of engineering. Thanks to their excellent long-term stability, reliability and rugged construction, the pressure transducers are suitable for use in both research and production, in mechanical engineering and industrial processes, aerospace engineering and many other applications.

These high-precision pressure transducers can be used for static and dynamic measurements on gaseous and liquid media. Being made of stainless steel they are also suitable for measurements on corrosive media. Critical media may result in damage around the welded seams inside the transducer. Please contact us.

### Description

Model 8264 high-precision pressure transducers measure the absolute pressure with respect to a vacuum. Built-in overload protection for measuring ranges  $\leq 0 \dots 500$  mbar prevents the sensor element being damaged by atmospheric pressure.

Model 8267 high-precision pressure transducers measure the pressure with respect to the surrounding atmosphere in measuring ranges  $\leq 0 \dots 20$  bar. They are designed as „true gauge“ sensors, i.e. the chamber behind the diaphragm is in direct contact with the atmosphere through a small opening in the sensor body. This atmosphere can be damp and corrosive, because the sensor element is protected by a second diaphragm.

In measuring ranges  $\geq 0 \dots 50$  bar, pressures are measured with respect to a sealed atmosphere of approximately 1 bar as reference pressure. The medium to be measured is conducted via the pressure connector into a sealed chamber where it acts on a diaphragm. This diaphragm is connected to the sensor element, a double bending beam, via a rod. Four foil strain gauges connected in a Wheatstone bridge are applied to the sensor element to convert the physical variable (pressure) into an electrical variable.

8264 EN

## Technical Data

Order Code		Measuring Range	Dimensions [mm]				Resonance Frequency [kHz]	Dead Volume [cm <sup>3</sup> ]
Absolute Measurement <b>Model 8264</b>	Against Atmosphere <b>Model 8267</b>		Model 8264		Model 8267			
			ø D	L	øD	L		
-	8267-4100	0 ... 100 mbar	-	-	57.2	67.9	0.5	5.24
-	8267-4200	0 ... 200 mbar	-	-	57.2	67.9	1.0	5.24
8264-4500	8267-4500	0 ... 500 mbar	38.1	81.7	44.5	72.8	1.3	4.10
8264-5001	8267-5001	0 ... 1 bar	38.1	81.7	44.5	72.8	1.6	4.10
8264-5002	8267-5002	0 ... 2 bar	38.1	81.7	38.1	73.0	1.7	2.79
8264-5005	8267-5005	0 ... 5 bar	38.1	81.7	38.1	73.0	2.5	2.79
8264-5010	8267-5010	0 ... 10 bar	38.1	81.7	38.1	73.0	4.0	2.79
8264-5020	8267-5020	0 ... 20 bar	38.1	81.7	38.1	73.0	7.2	2.79
8264-5050	8267-5050	0 ... 50 bar	38.1	81.7	38.1	81.7	12.0	2.79
8264-5100	8267-5100	0 ... 100 bar	38.1	81.7	38.1	81.7	20.0	2.79
8264-5200	8267-5200	0 ... 200 bar	38.1	71.9	38.1	71.9	40.0	1.97
8264-5500	8267-5500	0 ... 500 bar	38.1	71.9	38.1	71.9	80.0	1.97
8264-6001	8267-6001	0 ... 1000 bar	38.1	67.3	38.1	67.3	95.0	1.97
8264-6002	8267-6002	0 ... 2000 bar	38.1	67.3	38.1	67.3	110.0	1.97

### Electrical values

Bridge resistance: foil strain gauges 350 Ω , nominal  
 Calibration resistor: 59 kΩ ± 0.1 %  
 The bridge output voltage caused by a shunt of this value is given in the calibration protocol.  
 Excitation voltage: calibrated with 10 V DC or AC possible maximum 12 V DC or AC  
 Sensitivity: 3 mV/V, nominal  
 measuring range 0 ... 100 mbar 2 mV/V, nominal



### Environmental conditions

Range of operating temperature:  
 measuring range ≤ 0 ... 1000 bar - 70 °C ... 160 °C  
 measuring range 0 ... 2000 bar - 70 °C ... 95 °C  
 Nominal temperature range: 15 °C ... 70 °C  
 Influence of temperature on zero: ≤ ± 0.005 % F.S./K  
 Influence of temperature on sensitivity: ≤ ± 0.005 % Rdg./K

### Mechanical values

Combined error consisting of non-linearity, hysteresis and variation: < ± 0.1 % F.S.  
 Kind of measurement:  
 model 8264 absolute pressure  
 model 8267 pressure against atmosphere  
 Measuring ranges: refer to table  
 Dead volume: refer to table  
 Overload: 50 % over capacity  
 pressure transducers of model 8264 with measuring range ≤ 0 ... 500 mbar have a internal overload protection, active up to 1 bar.  
 Burst pressure:  
 measuring range ≤ 0 ... 200 bar 300 % over capacity  
 measuring range 0 ... 500 bar 200 % over capacity  
 measuring range ≥ 0 ... 1000 bar 70 % over capacity  
 Dynamic load  
 recommended: 70 % of capacity  
 possible: 100 % of capacity  
 Design:  
 Pressure transducer with hermetically sealed measurement chamber, diaphragm and housing are welded. Pressure transducers of model 8264 with measuring range ≥ 0 ... 50 bar uses a sealed atmosphere, pressure approx. 1 bar, as reference.  
 Material: stainless steel 17 - 4 PH (similar to material 1.4542)  
 Pressure connection:  
 measuring range ≤ 0 ... 100 bar external thread 1/4-18NPT  
 measuring range 0 ... 200 bar, 0 ... 500 bar int. thread 1/4-18NPT  
 measuring range ≥ 0 ... 1000 bar Autoklave AE F250-C  
 Sealing: at transducer, conical, self-sealing thread, respectively with conical nipple.  
 Electrical connection:  
 6 pin bayonet plug-in connector Souriau 851-07A10-6P  
 Wiring (standard):  
 pins A + B excitation voltage positive  
 pins C + D excitation voltage negative  
 pin E output signal negative  
 pin F output signal positive  
 Mating connector: (included in scope of delivery) model 9945  
 Souriau 851-06E-C-10-6S or Amphenol 62GB-16F-10-6S  
 Dimension: refer to table and dimensional drawing  
 Weight: approx. 290 g

### Dimensional drawing models 8264 and 8267

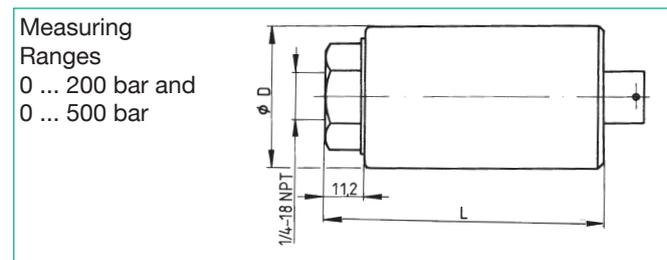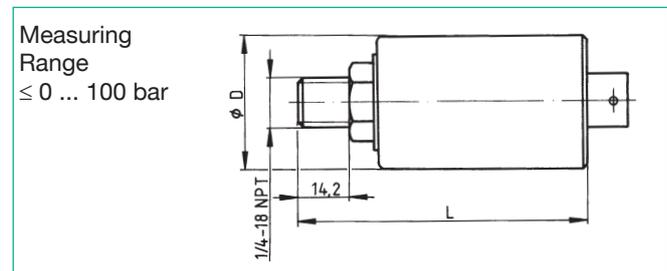

### Order Codes

Refer to tables, mention options with corresponding short terms.

### Accessories

Connecting cable for transducers with bridge output, with connector and socket, 6 pin, shielded, bending radius > 5 mm, PVC insulated, length 3 m

- with open, color coded and tinned cable ends **Model 9986**
- to burster evaluation electronics (desktop versions) **Model 9911**
- for transducers with internal amplifier, with open color coded and tinned cable ends **Model 99545-000D-0160030**
- Other lengths or special cable versions on request.

### Options

- Option **...-xxFxxxxx**  
Extension of the nominal temperature range to 20 °C ... 120 °C
- Option **...-xxGxxxxx**  
Extension of the nominal temperature range to 20 °C ... 160 °C, possible for measuring range ≥ 0 ... 1 bar
- Option **...-x1xxxxxx**  
Internal measurement amplifier with voltage output 0 ... 5 V DC technical data refer to data sheet 83-IMV
- Option **...-x4xxxxxx**  
Internal measurement amplifier with current output 4 ... 20 mA, technical data refer to data sheet 83-IMV