


# Technical Specification

## CO-BF Carbon Monoxide Sensor



Figure 1 CO-BF Schematic Diagram

PATENTED

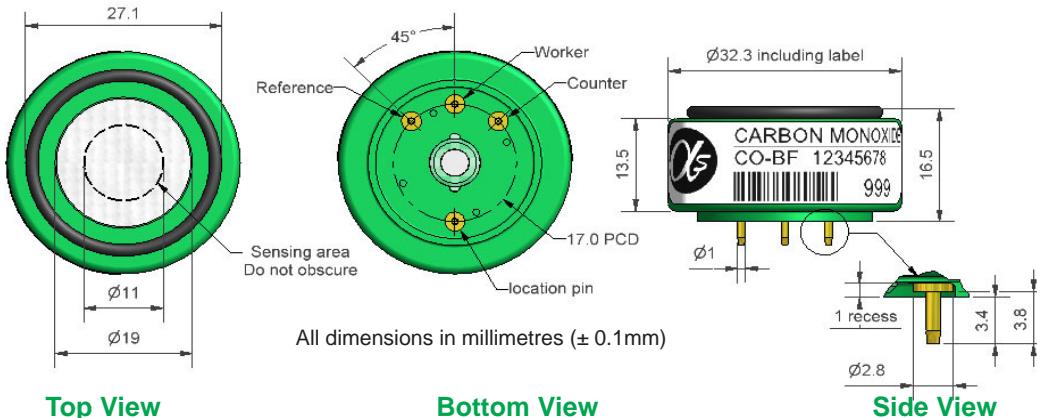

Top View

Bottom View

Side View

<b>PERFORMANCE</b>	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 400ppm CO t <sub>90</sub> (s) from zero to 400ppm CO ppm equivalent in zero air RMS noise (ppm equivalent) ppm limit of performance warranty ppm CO error at full scale, linear at zero, 400ppm CO maximum ppm for stable response to gas pulse	80 to 120 < 30 < ± 2 < 0.5 5,000 < ± 15 10,000	
<b>LIFETIME</b>	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air % change/year in lab air, monthly test months until 80% original signal (24 month warranted)	< 0.1 < 3 > 24	
<b>ENVIRONMENTAL</b>	Sensitivity @ -20°C % (output @ -20°C/output @ 20°C) @ 400ppm CO Sensitivity @ 50°C % (output @ 50°C/output @ 20°C) @ 400ppm CO Zero @ -20°C ppm equivalent change from 20°C Zero @ 50°C ppm equivalent change from 20°C	65 to 85 105 to 115 ± 3 < ± 8		
<b>CROSS SENSITIVITY</b>	Filter capacity Filter capacity Filter capacity Filter capacity H <sub>2</sub> S sensitivity NO <sub>2</sub> sensitivity Cl <sub>2</sub> sensitivity NO sensitivity SO <sub>2</sub> sensitivity H <sub>2</sub> sensitivity C <sub>2</sub> H <sub>4</sub> sensitivity NH <sub>3</sub> sensitivity	ppm-hrs ppm-hrs ppm-hrs ppm-hrs % measured gas @ 20ppm % measured gas @ 10ppm % measured gas @ 10ppm % measured gas @ 50ppm % measured gas @ 20ppm % measured gas @ 400ppm % measured gas @ 400ppm % measured gas @ 20ppm	H <sub>2</sub> S NO <sub>2</sub> NO SO <sub>2</sub> H <sub>2</sub> S NO <sub>2</sub> Cl <sub>2</sub> NO SO <sub>2</sub> H <sub>2</sub> at 20°C C <sub>2</sub> H <sub>4</sub> NH <sub>3</sub>	250,000 120,000 120,000 160,000 < 0.1 < 0.1 < 0.1 < 25 < 0.1 < 65 < 65 < 0.1
<b>KEY SPECIFICATIONS</b>	Temperature range Pressure range Humidity range Storage period Load resistor Weight	°C kPa % rh continuous months @ 3 to 20°C (stored in sealed pot) Ω (recommended) g	-30 to 50 80 to 120 15 to 90 6 10 to 47 < 13	

**NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.



# Technical Specification

## CO-BF Performance Data

Figure 2 Sensitivity Temperature Dependence


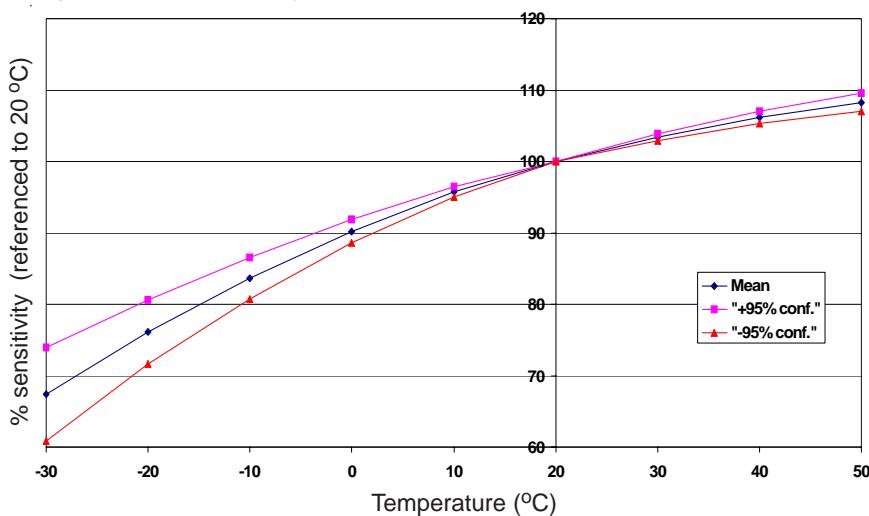


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and  $\pm 95\%$  confidence intervals are shown.

Figure 3 Sensitivity Long Term Stability

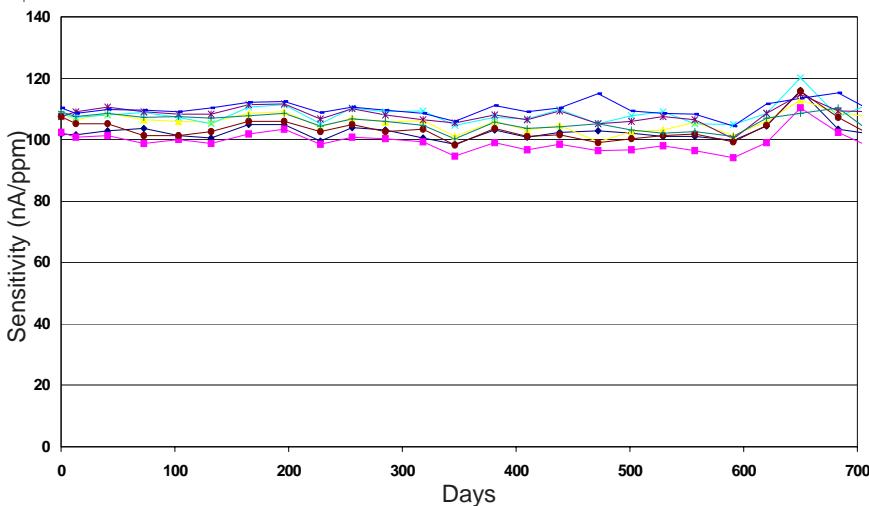

When sensors are tested monthly, their very good stability shows that they can be used in fixed sites, where maintenance and recalibration costs are important.

Figure 4 Response to 1% CO

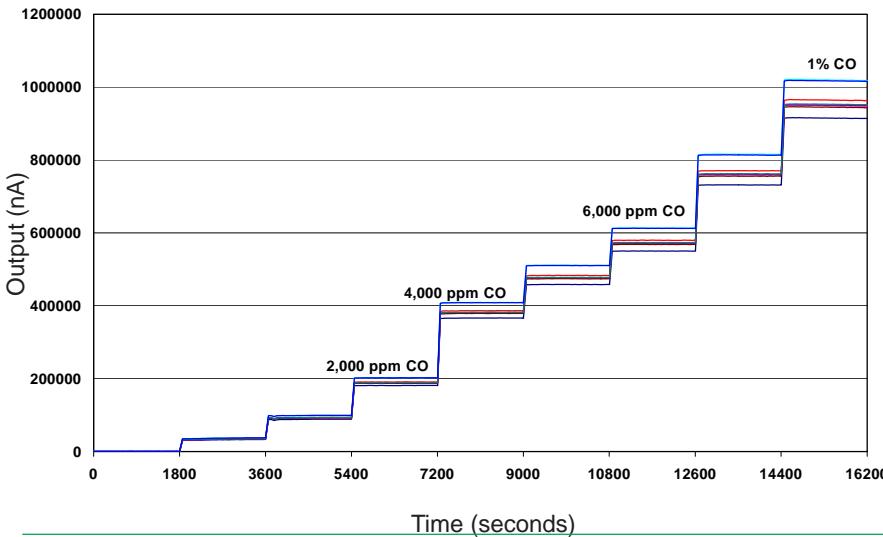


Figure 4 shows the response to step changes in CO concentrations from zero to 1% by volume.