
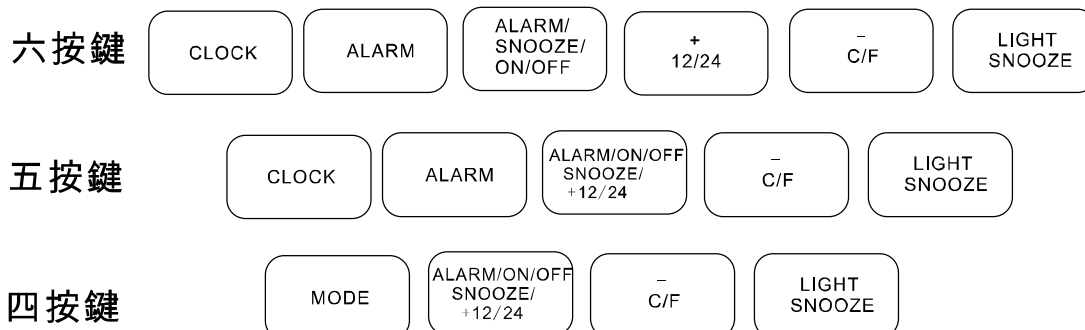


# 年曆+溫濕度時鐘

## 一)功能特性

- 1)工作電壓 3.0V,超低電源功耗
- 2)時鐘功能,可選擇12/24小時制轉換
- 3)有鬧鐘顯示,5分鐘貪睡功能
- 4)年曆範圍:2000~2099(開機顯示2004年 )
- 5)有3秒LED照明
- 6)設置星期時有6種語言選擇(英 法 意 西 荷 德)
- 7)溫度測量範圍 : -9.9 ~ +70degC(+14.18 ~ 158degF)  
 溫度顯示精度:0.1degC  
 溫度精確度:+/-1degC
- 8)濕度測量範圍:20 ~ 90%RH  
 濕度顯示精度:1%RH  
 濕度精確度:+/-5%RH
- 9)開機可以選擇攝氏或華氏單位


## 二)液晶顯示圖案(含按鍵圖)

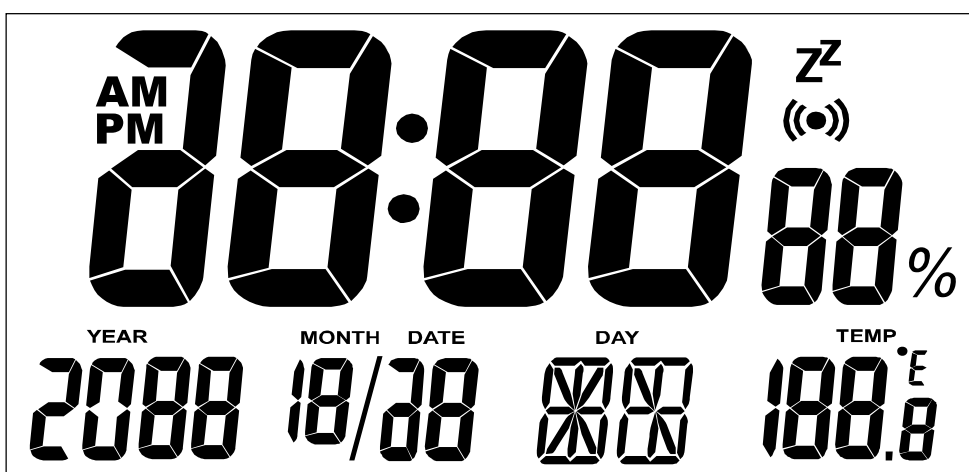




# 年曆+溫濕度時鐘

## 2)設定鬧鐘

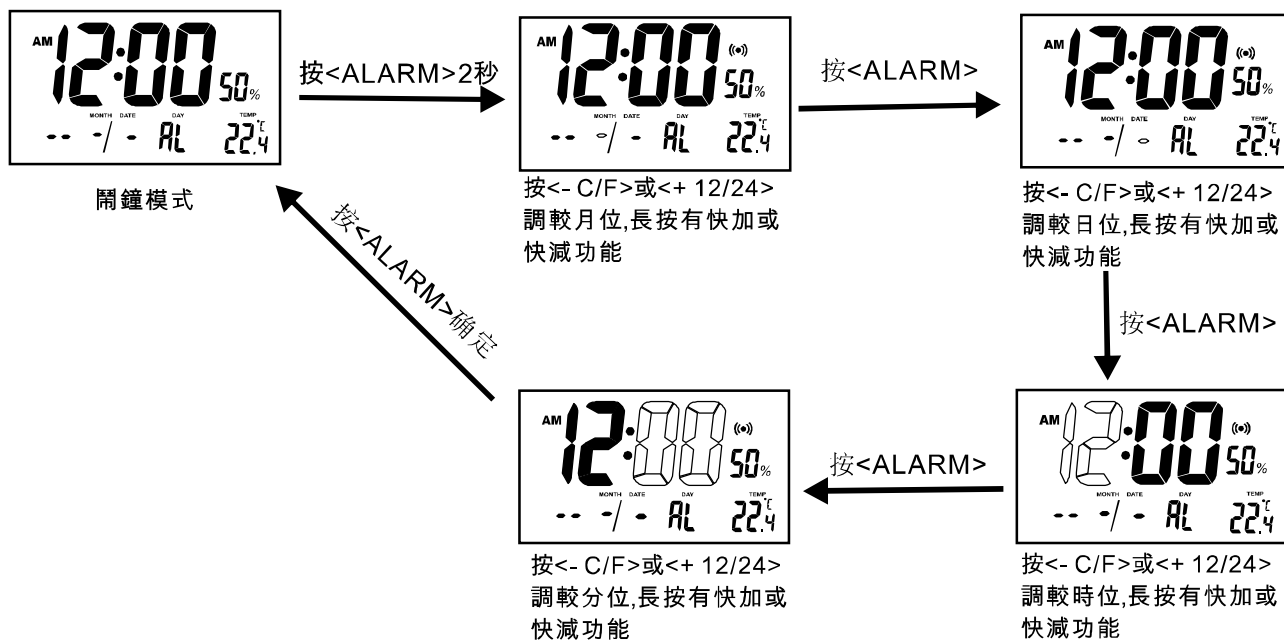


當使用4按鍵時，按Mode轉換畫面，按Mode確認。

# 年曆+溫濕度時鐘

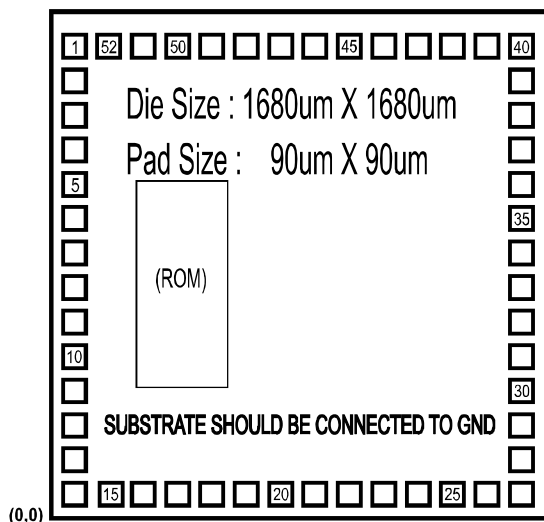


NO	NAME	X	Y	NO	NAME	X	Y
1	BAK	77.5	1602.5	27	SEG13	1602.5	77.5
2	XIN	77.5	1472.5	28	SEG14	1602.5	207.5
3	XOUT	77.5	1357.5	29	SEG15	1602.5	322.5
4	GND	77.5	1242.5	30	SEG16	1602.5	437.5
5	VDD1	77.5	1127.5	31	SEG17	1602.5	552.5
6	VDD2	77.5	1012.5	32	SEG18	1602.5	667.5
7	VDD3	77.5	897.5	33	SEG19	1602.5	782.5
8	CUP1	77.5	782.5	34	SEG20	1602.5	897.5
9	CUP2	77.5	667.5	35	SEG21	1602.5	1012.5
10	COM1	77.5	552.5	36	SEG22	1602.5	1127.5
11	COM2	77.5	437.5	37	SEG23	1602.5	1242.5
12	COM3	77.5	322.5	38	CX	1602.5	1357.5
13	COM4	77.5	207.5	39	RR	1602.5	1472.5
14	COM5	77.5	77.5	40	RT	1602.5	1602.5
15	SEG1	207.5	77.5	41	RH	1472.5	1602.5
16	SEG2	322.5	77.5	42	SEG28	1357.5	1602.5
17	SEG3	437.5	77.5	43	SEG29	1242.5	1602.5
18	SEG4	552.5	77.5	44	SEG30	1127.5	1602.5
19	SEG5	667.5	77.5	45	BZ	1012.5	1602.5
20	SEG6	782.5	77.5	46	K11	897.5	1602.5
21	SEG7	897.5	77.5	47	K12	782.5	1602.5
22	SEG8	1012.5	77.5	48	K13	667.5	1602.5
23	SEG9	1127.5	77.5	49	K14	552.5	1602.5
24	SEG10	1242.5	77.5	50	RESET	437.5	1602.5
25	SEG11	1357.5	77.5	51	LIGHT	322.5	1602.5
26	SEG12	1472.5	77.5	52	N.C.	207.5	1602.5

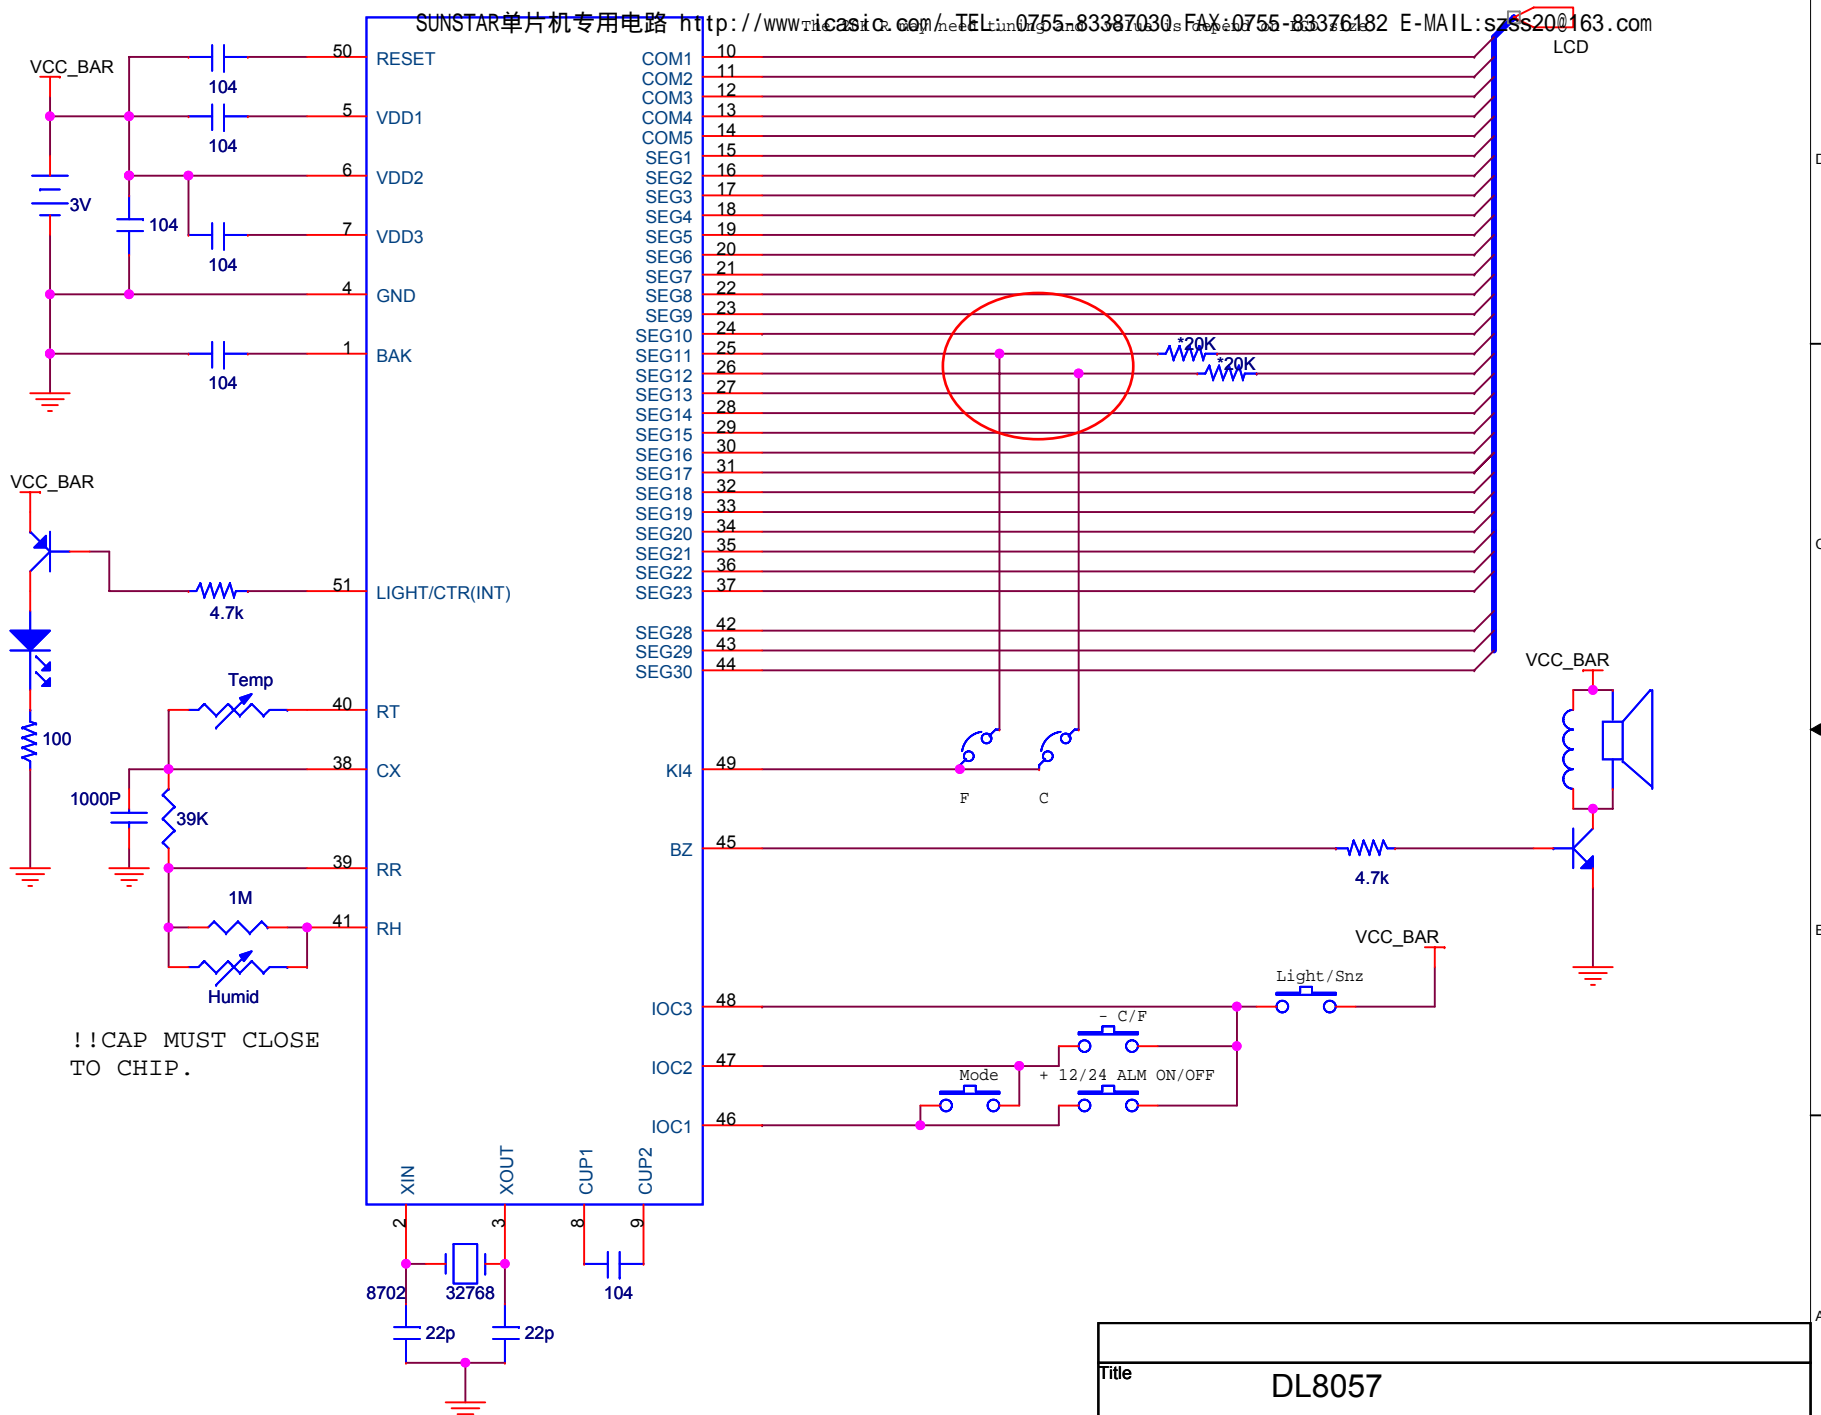

!!CAP MUST CLOSE TO CHIP.

Title			DL8057		
Size	Document Number				RRev
					1.0
Date:	Tuesday, July 15, 2008		Sheet	1	of 1

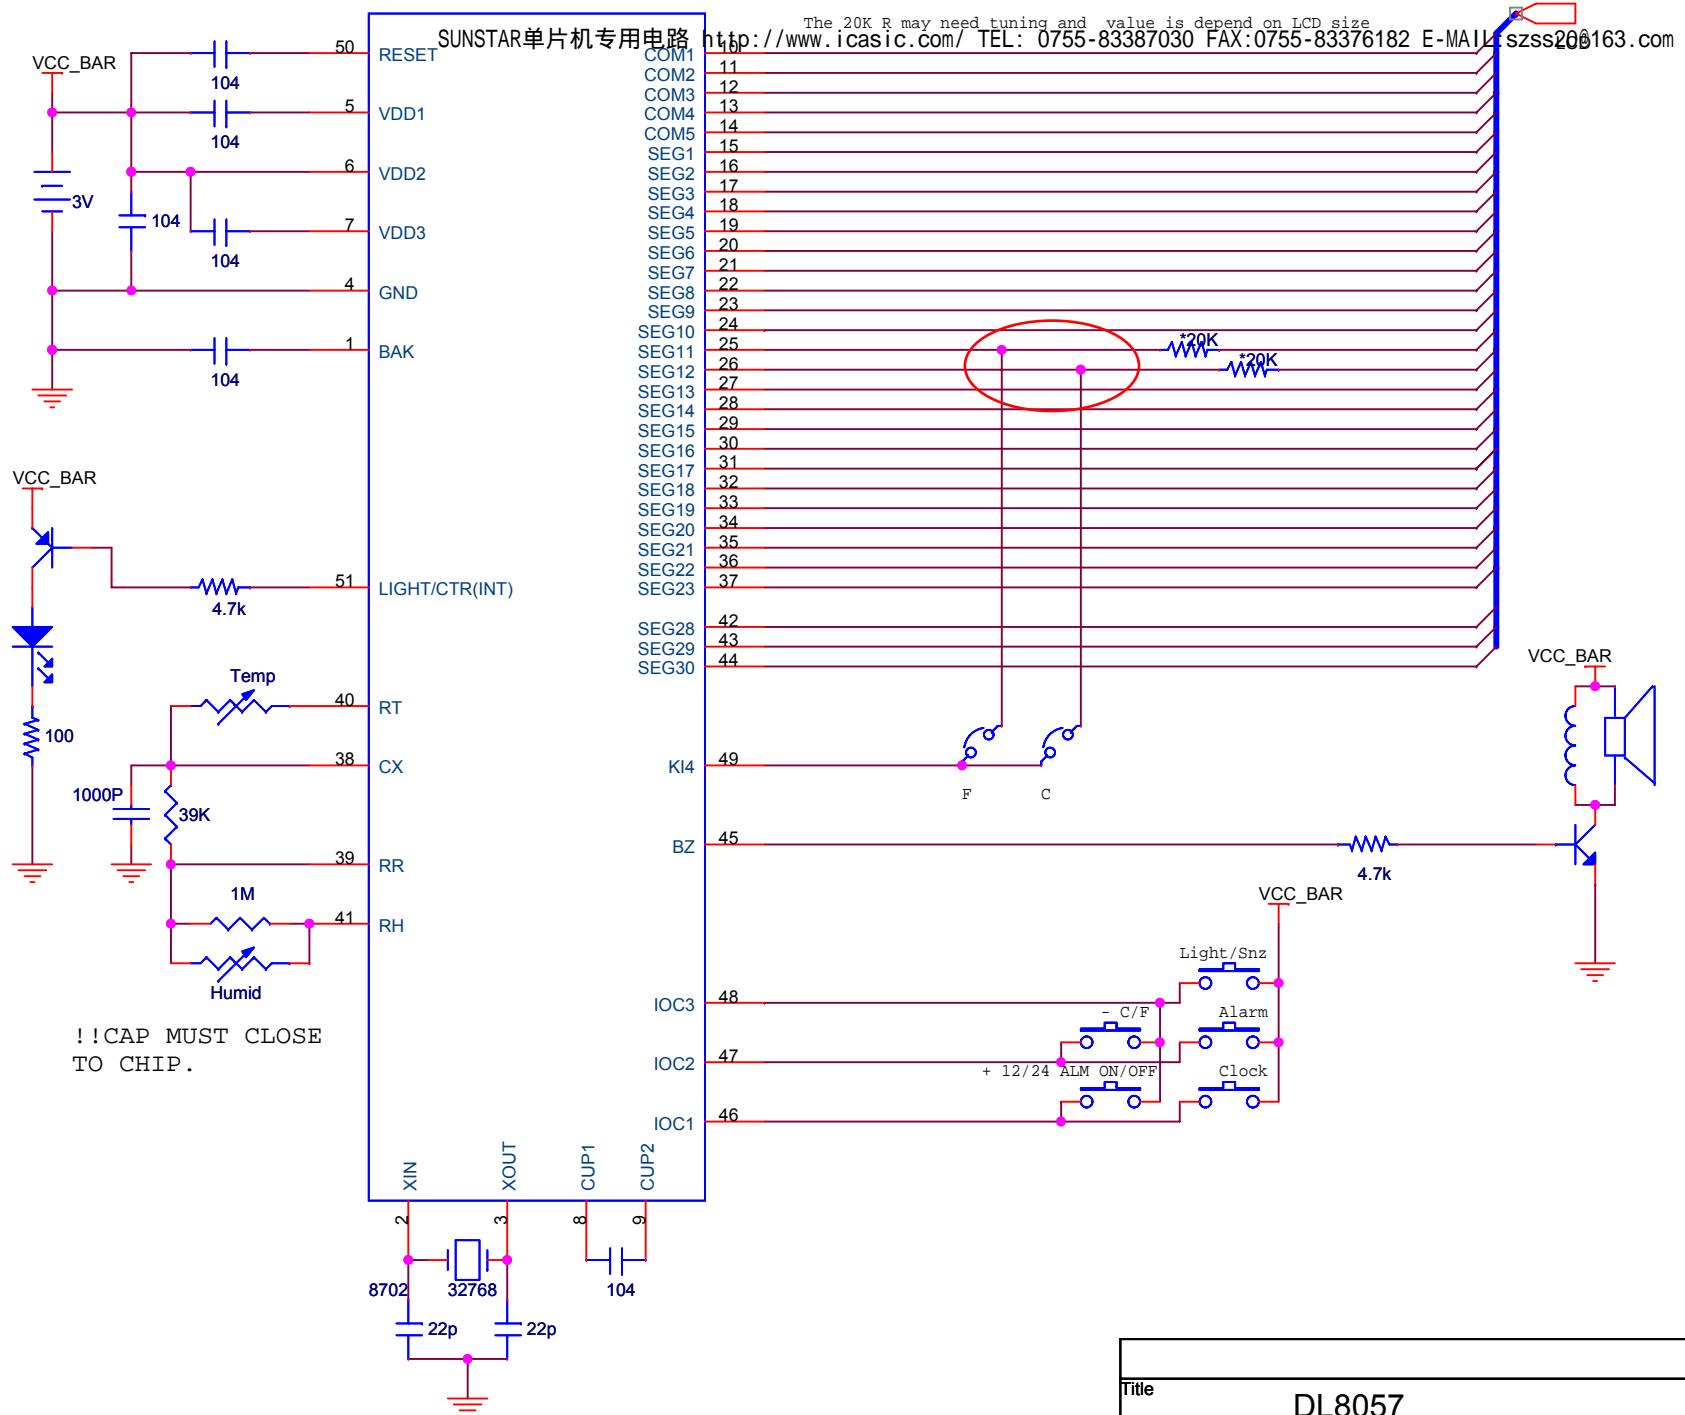


The .20K R may need tuning and value is depend on LCD size  
<http://www.icasic.com/> TEL: 0755-83387030 FAX:0755-83376182 E-MAIL: szss20@163.com

SUNSTAR单片机专用电路 <http://www.icasic.com/> TEL: 0755-83387030 FAX:0755-83376182 E-MAIL: szss20@163.com

Title		DL8057	
Size	Document Number	Rev	Rev
			1.0
Date:	Tuesday, July 15, 2008	Sheet	1 of 1

SUNSTAR单片机专用电路

The 20K\_R may need tuning and value is depend on LCD size  
<http://www.icasic.com/> TEL: 0755-83387030 FAX:0755-83376182 E-MAIL:szss20@163.com

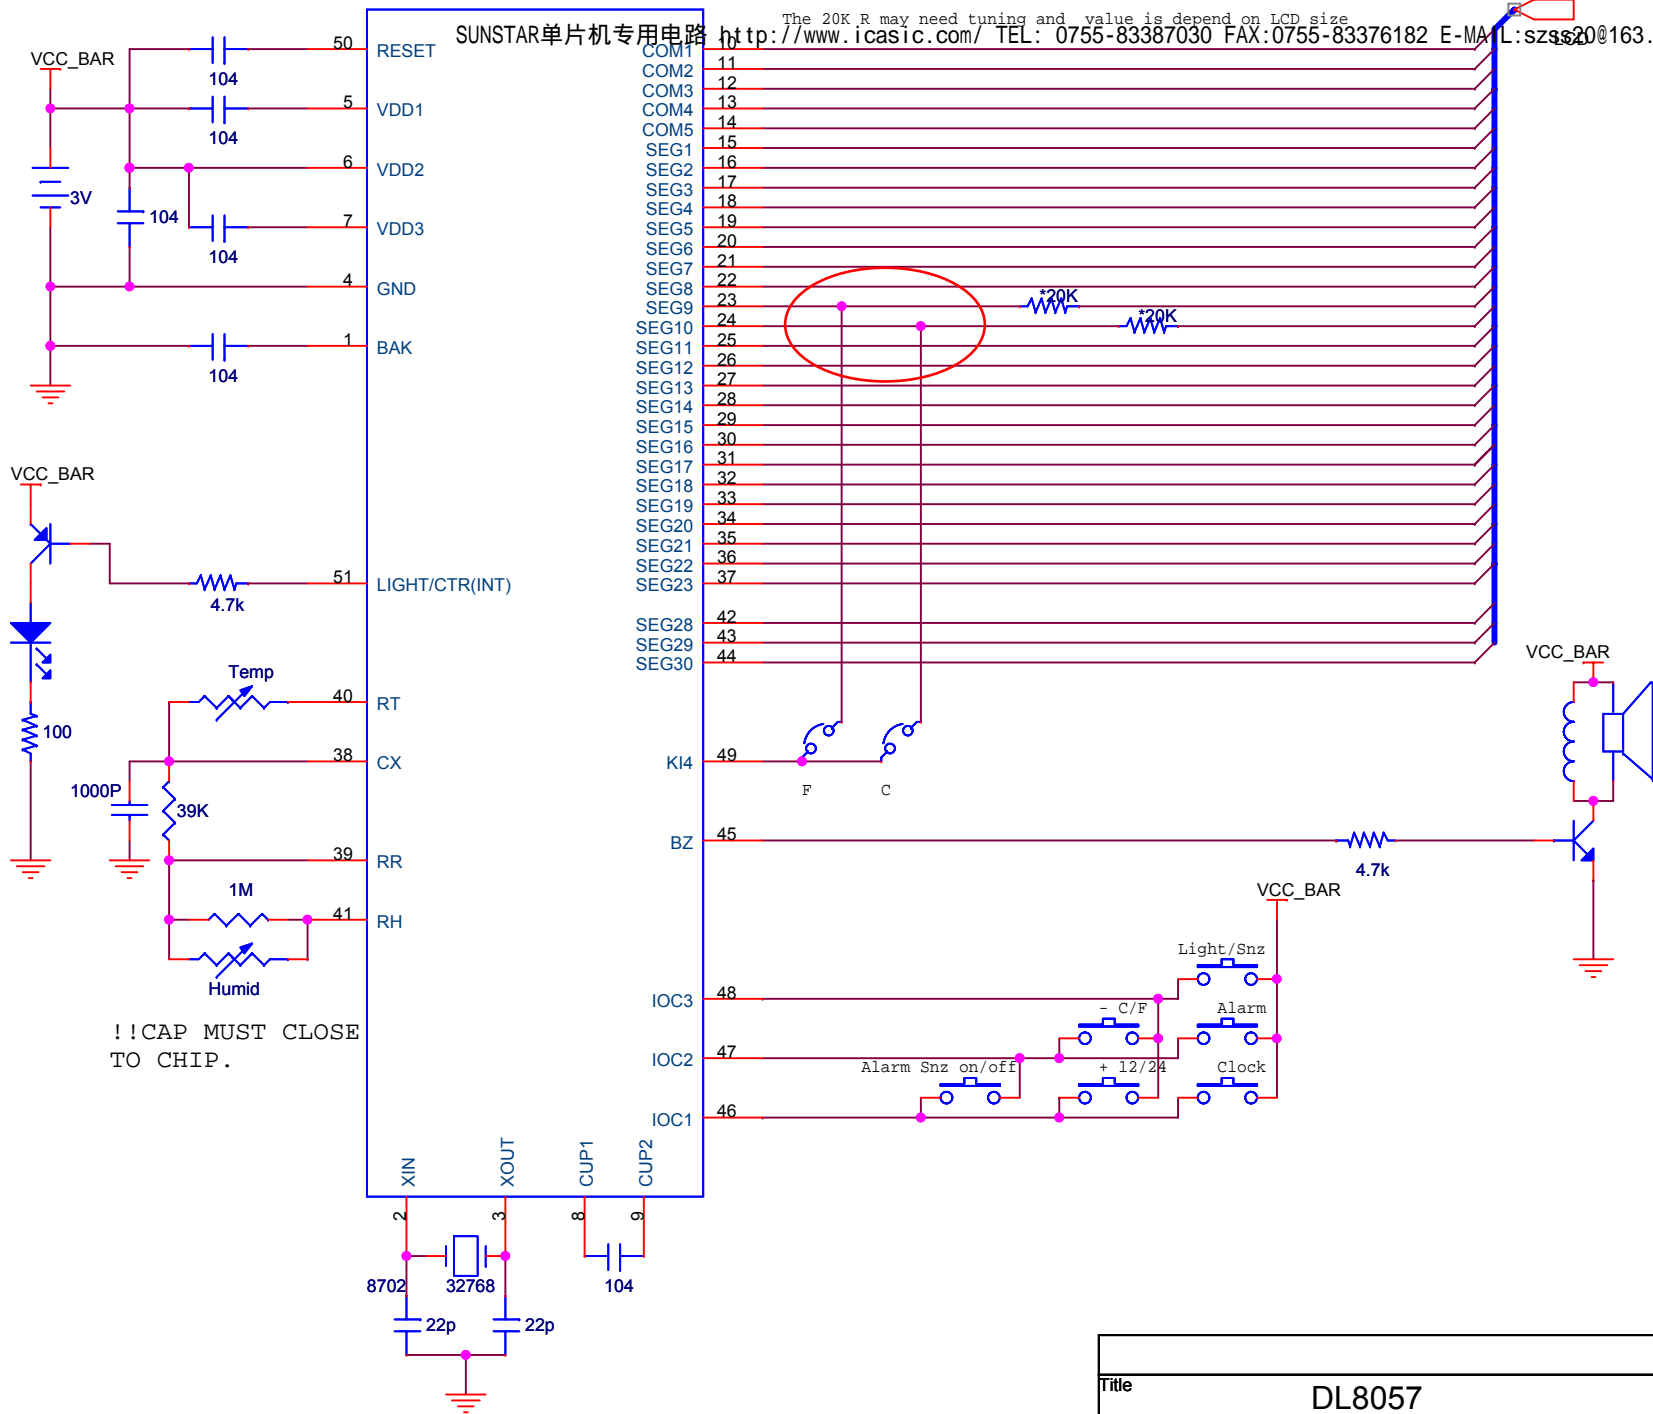


!!CAP MUST CLOSE TO CHIP.

SUNSTAR单片机专用电路

<http://www.icasic.com/> TEL: 0755-83387030 FAX:0755-83376182 E-MAIL:szss20@163.com

Title			DL8057		
Size	Document Number				Rev
					1.0
Date:	Tuesday, July 15, 2008		Sheet	1 of 1	

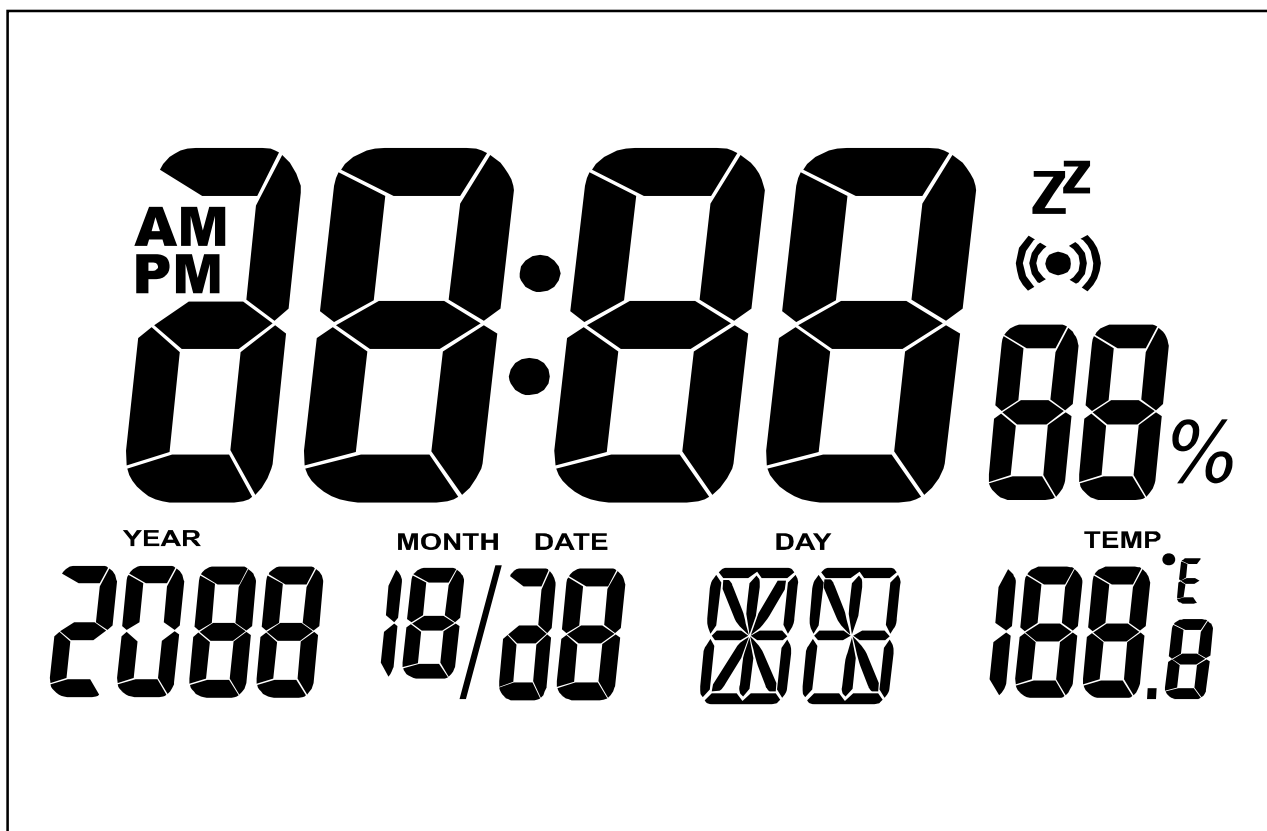

1/5 DUTY, 1/3 Bias, Vlcd=4.5V



