# Model MA36S Multiturn Absolute





### **Features**

- Standard Size 36 mm Package (1.42")
- Durable Magnetic Technology
- Multiturn Absolute Encoder (12 Bit/40 Bit)
- · SSI and CANopen Communications
- · Proven New Turns Counting Technology No Gears or Batteries

The Model MA36S Multiturn Absolute Accu-Coder™ is ideal for a wide variety of industrial applications that require an encoder with the capability of absolute positioning output. Its fully digital output and innovative use of battery-free multiturn technology make the Model MA36S an excellent choice for all applications, especially ones with a high presence of noise. Its durable magnetic technology and high sealing make it a perfect choice for dirty industrial environments. Available with a 6 mm or 1/4" shaft and a servo mount, the Model MA36S is easily designed into a variety of applications.


## **Common Applications**

Robotics, Telescopes, Antennas, Medical Scanners, Windmills, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y **Positioning Tables** 

# Model MA36S Ordering Guide

For Single Turn applications see Model SA36S

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

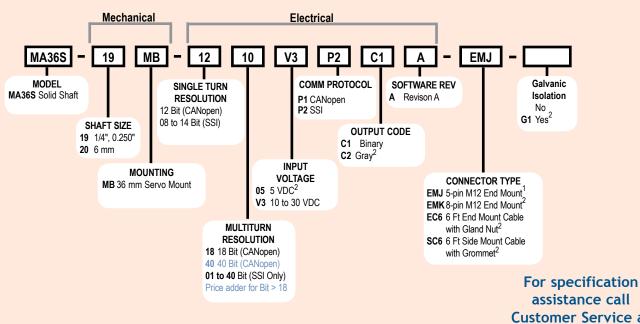

assistance call **Customer Service at** 1-800-366-5412

#### Notes:

- 1 Available with CANopen only
- 2 Available with SSI only

# Model MA36S Multiturn Absolute

# **Model MA36S Specifications**

#### Electrical

Input Voltage .10 to 30 VDC max SSI or CAN 5 VDC SSI Only

Input Current. .50 mA max with no external load

Power Consumption.0.5 W max Resolution (Single)...12 bit (CAN)

8 to 14 bit (SSI) Resolution (Multi) ..... Up to 40 bit multiturn (CANopen or SSI)

Less than .15° (CANopen) Accuracy.. Less than .35° (SSI)

#### **CANopen Interface**

Protocol..... ... CANopen:

- Communication profile CiA 301

- Device profile for encoder CiA 406 V3.2 class C2

Node Number ...... 0 to 127 (default 127)

Baud Rate......10 Kbaud to 1 Mbaud with automatic bit

rate detection

The standard settings as well as any customization in the software can be changed via LSS (CiA 305) and the SDO protocol, e.g. PDOs, scaling, heartbeat, node-ID, baud rate,

#### **Programmable CAN Transmission Modes**

Synchronous....... When a synchronisation telegram

(SYNC) is received from another bus node, PDOs are transmitted indepen-

dantly

Asynchronous .... . A PDO message is triggered by an

internal event (e.g. change of measured

value, internal timer, etc.)

#### SSI Interface

Clock Input.....via opto coupler

Clock Frequency... 100KHz to 500KHz

Data Output .......... RS485 / RS422 compatable

Output Code ...... Gray or binary SSI Output ...... Angular position value Parity Bit..... Optional (even/odd)

Error Bit.....Optional

Turn On Time......<1.5 sec

Pos. Counting Dir.. Connect DIR to GND for CW

Connect DIR to VDC for CCW

(when viewed from shaft end)

Set to Zero ..... Apply VDC for 2 sec

#### Mechanical

Max Shaft Speed..... 12,000 RPM

Shaft Size. .6 mm. 0.250"

Radial Shaft Load.....7 lb (32 N) = bearing life 1.10<sup>10</sup> revs

3.6 lb (16 N) = bearing life 1.10<sup>11</sup> revs ..5 lb (20 N) = bearing life 1.10<sup>10</sup> revs

Axial Shaft Load .. 2.3 lb (10 N) = bearing life 1.10<sup>11</sup> revs

Starting Torque <0.45 oz-in typical


Housing.. Ferrous chrome-plated magnetic screening

Mounting. Flange or servo type Weight. .5 oz typical

#### Environmental

Operating Temp. -40° to +80° C -40° to +100° C Storage Temp. .95% RH non-condensing Humidity. .5 g @ 10 to 2000 Hz Vibration.. Shock .100 g @ 6 ms duration Sealing..... IP67, shaft sealed to IP65

# Model MA36S Solid Shaft

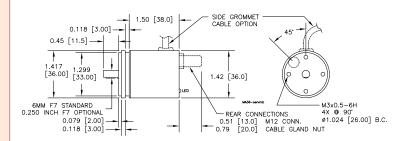

## Wiring Table

#### **CANopen Encoders**

Function	Pin	
+VDC	2	] 1 -
Ground (GND)	3	5
CAN <sub>High</sub>	4	
CAN <sub>Low</sub>	5	]
CAN <sub>GND</sub> / shield	1	

#### SSI Encoders

	8-pin M12	Cable
Function		
Ground (GND)	1	White
+VDC	2	Brown
SSI CLK+	3	Green
SSI CLK-	4	Yellow
SSI DATA+	5	Gray
SSI DATA-	6	Pink
PRESET	7	Blue
DIR	8	Red
Shield	housing	Side Exit - Housing End Exit - N/C
	2 1 8 7 6 3 4 5	